



University of
Hertfordshire **UH**

TV SET

GROUP 6

ADIL-AL-MUBEEN CHOWDHURY

TRAVIS HARDY

LOUIS WESTON

TYRESE FREDERICK

UNIVERSITY OF HERTFORDSHIRE

BA (Hons) Interior Architecture and Design

6CTA1094-0906-2024 - ADVANCED DESIGN SKILLS


INTRODUCTION

INTRODUCING THE GROUP 6 DESIGNERS:

Our group comprises a talented mix of individuals, each bringing unique expertise to ensure the success of this project. Here is a introduction to the team members and their contributions:



NAME: Adil-Al-Mubeen Chowdhury
ROLE: Project Coordinator and Designer
SKILLS OR STRENGTHS: CAD drawing, SketchUp Model, Renders and Notes
CONTRIBUTION: Responsible for coordinating the team, managing tasks to the team members, Constructed the design using SketchUp, Taking Notes on lecture and ideas for designs, Renders and CAD Drawing (Technical drawings)



NAME: Tyrese Frederick
ROLE: Storyboard Artist and Renderer
SKILLS OR STRENGTHS: Renders (Lumion), Notes, Storyboard and SketchUp
CONTRIBUTION: Assist designing using SketchUp Model, Taking Notes on lecture and ideas for designs, Created the Client presentation, Created the Storyboard Drawing and Making a realistic Renders with fixture of lighting included



NAME: Travis Hardy
ROLE: Conceptual Designer
SKILLS OR STRENGTHS: Creativity, Concept, Notes, Rhino and SketchUp
CONTRIBUTION: Constructed the design using the combination of SketchUp and Rhino, Taking Notes on lecture and ideas for designs and created a Design concepts for the TV Set and platform



NAME: Louis Weston
ROLE: Researcher & Material Specialist
SKILLS OR STRENGTHS: Creativity, Concept, Research and Notes
CONTRIBUTION: Constructed the designs using SketchUp, Taking Notes on lecture and ideas for designs , created a Design concepts for the TV Set Furnitures, Created lists of equipments and prices for Specification and Created Bespoke design detailing



OBJECTIVE FOR GROUP 6:

To guarantee the effective completion of the deliverables, this project is broken up into four main components, each of which calls for cooperation and individual contributions. To comprehend the requirements for each component, please carefully read the details below.

Part 1: SketchUp Model

Develop a comprehensive SketchUp model of B05, ensuring all aspects are represented accurately.

Part 2: Drawings and Key Construction Elements

Make a comprehensive set of drawings that emphasise and incorporate important construction components.

The following elements are necessary:

1. Annotated References: Include clear annotations and notes to explain design decisions.
2. Renders: Provide renders of spaces and alternative space aesthetics for visual context.
3. Storyboard: Develop a storyboard outlining the design narrative.
4. Technical Plan: Create a technical plan detailing critical construction elements.
5. Elevations and Sections: Ensure all elevations and sections are accurately represented.
6. Bespoke Design Detailing: Highlight specific bespoke design details with clarity.
7. Specification: Include a detailed specification for materials, finishes, and other relevant aspects.

Part 3: Client Presentation

Prepare a concise, professional client presentation summarizing the project:

1. Project Brief: Provide an overview of the project's scope and objectives.
 2. Site and Project Analysis: Include analysis findings related to the site and project requirements.
 3. Final Design Element: Present the finalized design in a cohesive manner.
- All components for this section should be compiled into one single PDF.

Part 4: Lecture Notes

Document lecture notes for reference and submission:

1. Group Members Notes: Collect all lecture notes for the group in a separate PDF file.
2. Individual Notes: Each group member must include their own lecture notes & ideas to create insights for their own designs in individual PDF files.

Submission Guidelines

- Ensure all files are complete, organized, and submitted by the deadline.
- Collaboration is critical between Parts 1 & 2, while Parts 3 & 4 require both group & individual contributions to be made.
- All deliverables must meet professional standards of quality and clarity.


Next Steps:

- Make sure to assign roles for each part to everyone in the group to evenly distribute the work load while keeping up with all the tasks and challenges assigned.

“If you can film an idea in your mind, follow that film idea shot for shot, scene for scene, that idea is worth making.” - CRAIG MAPP




MAIN OBJECTIVE

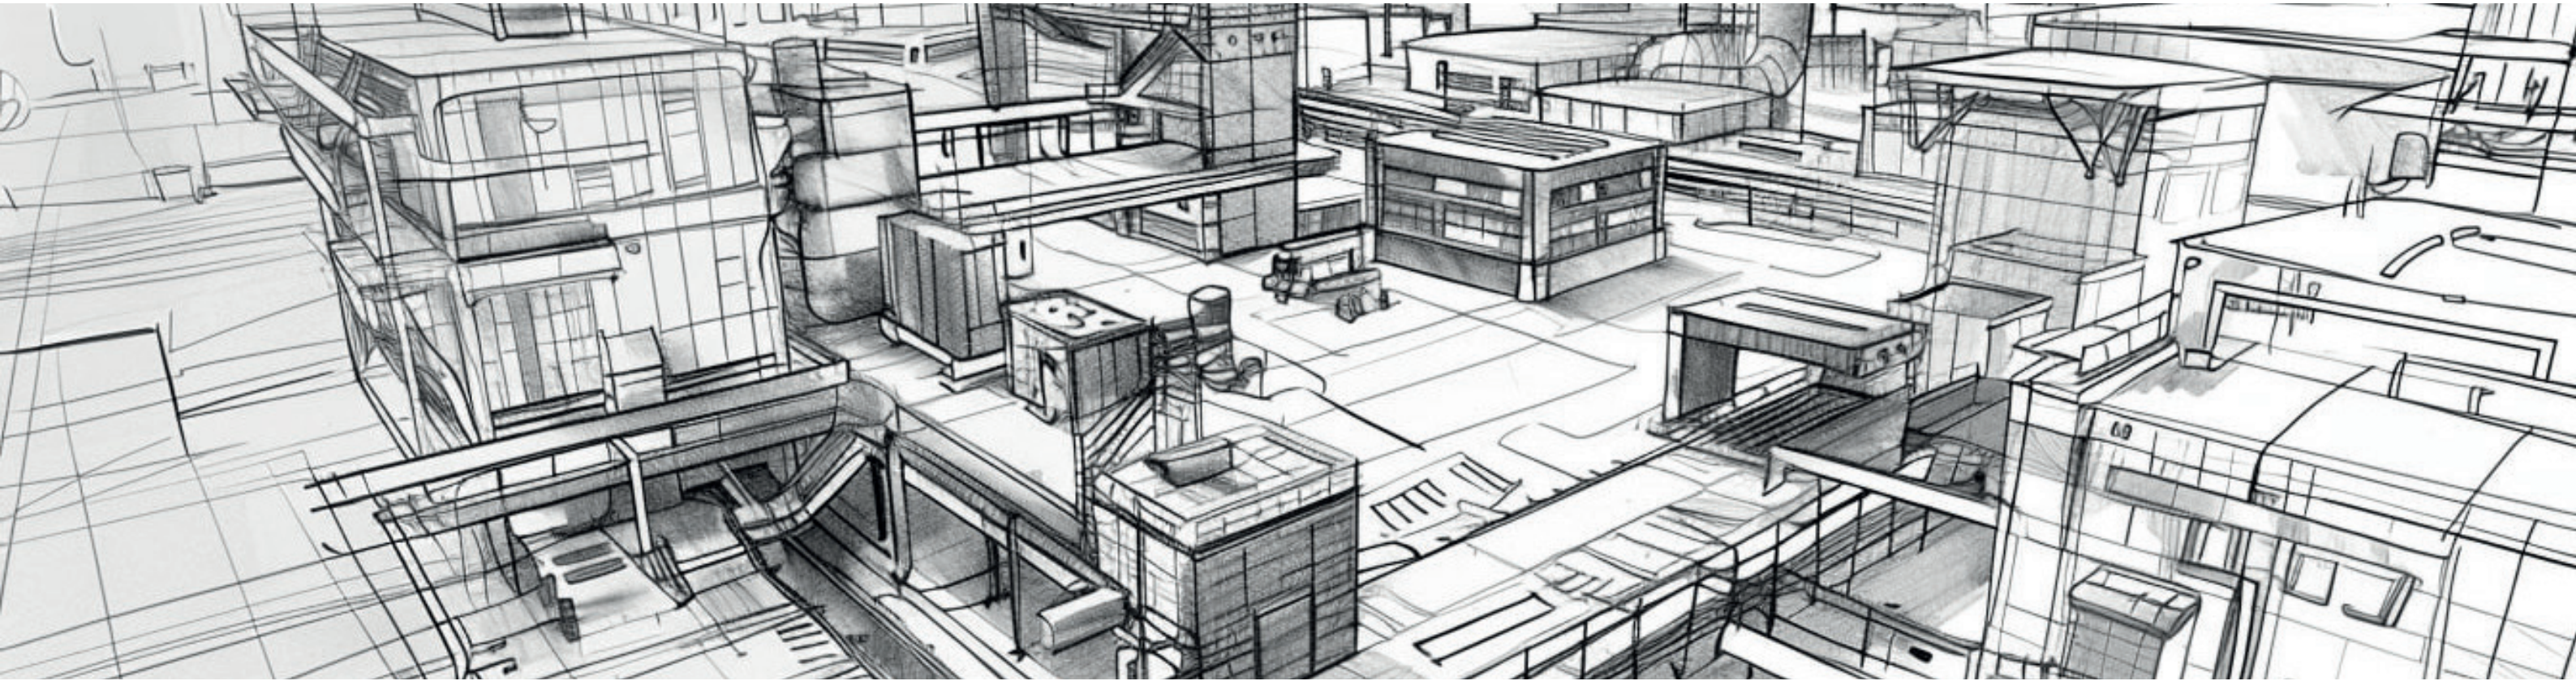



- Our aim was to create a set that can act as a 3 in 1 set for different genres. A morning show , a intellectual show and late night show
- When designing the set, we took inspiration from shows like good morning Britain and the one show along with films such as the invisible man (2020)
- We wanted the set to allow easy transformation from show to show to save time and resources

We wanted to give of a futuristic feel to our set by employing fluid shapes which gives of a sense of movement to the audience

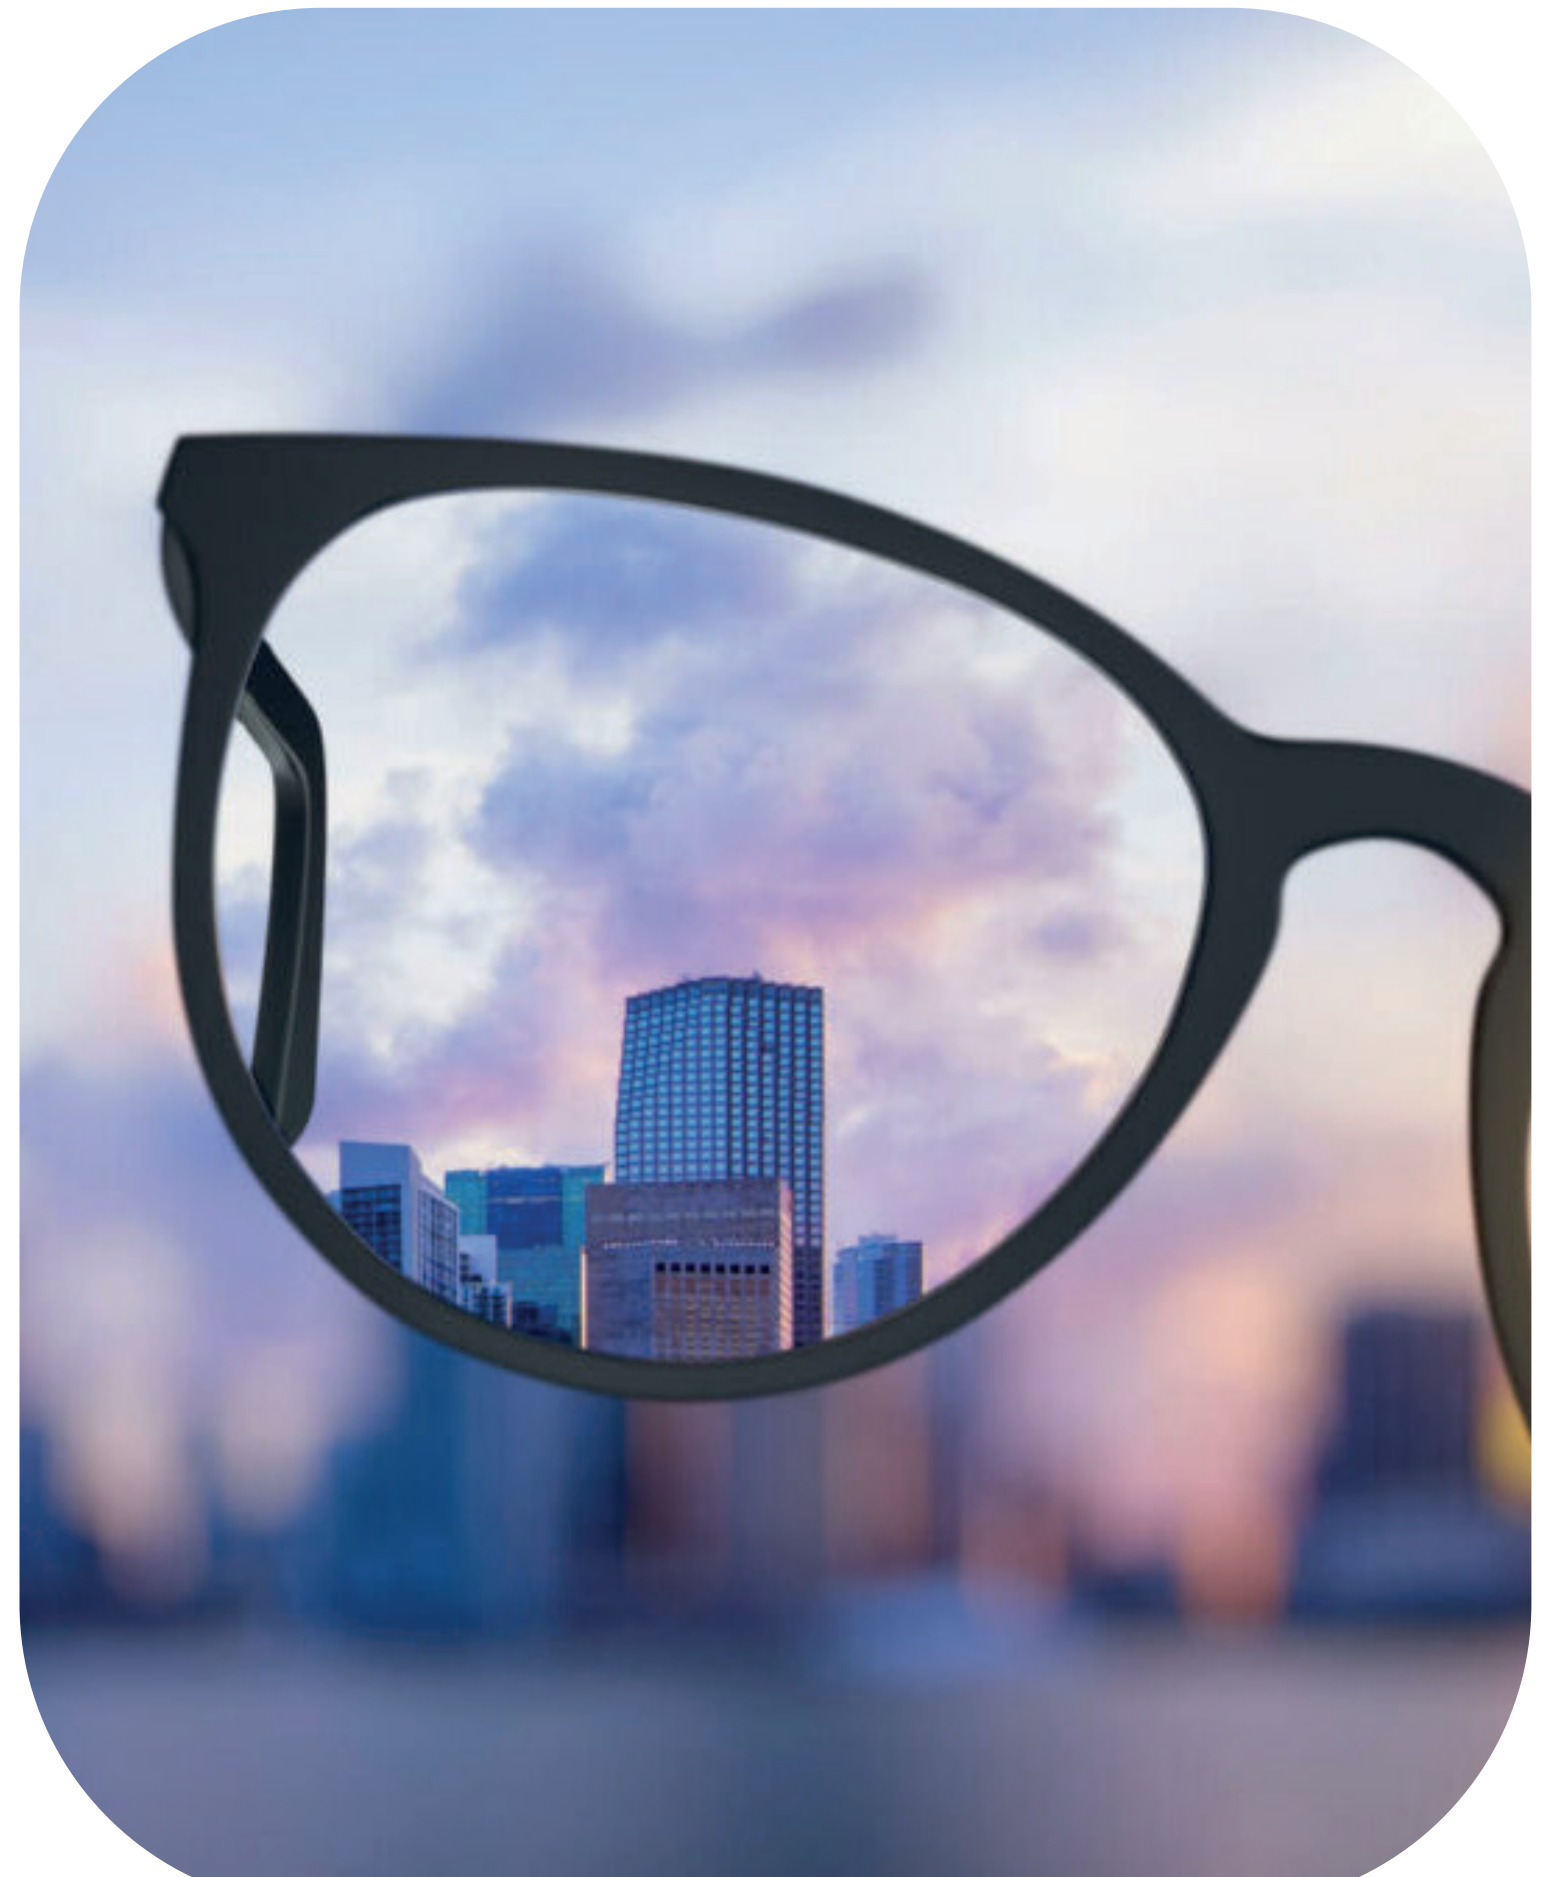

TECHNICAL DRAWING

FLOOR PLAN

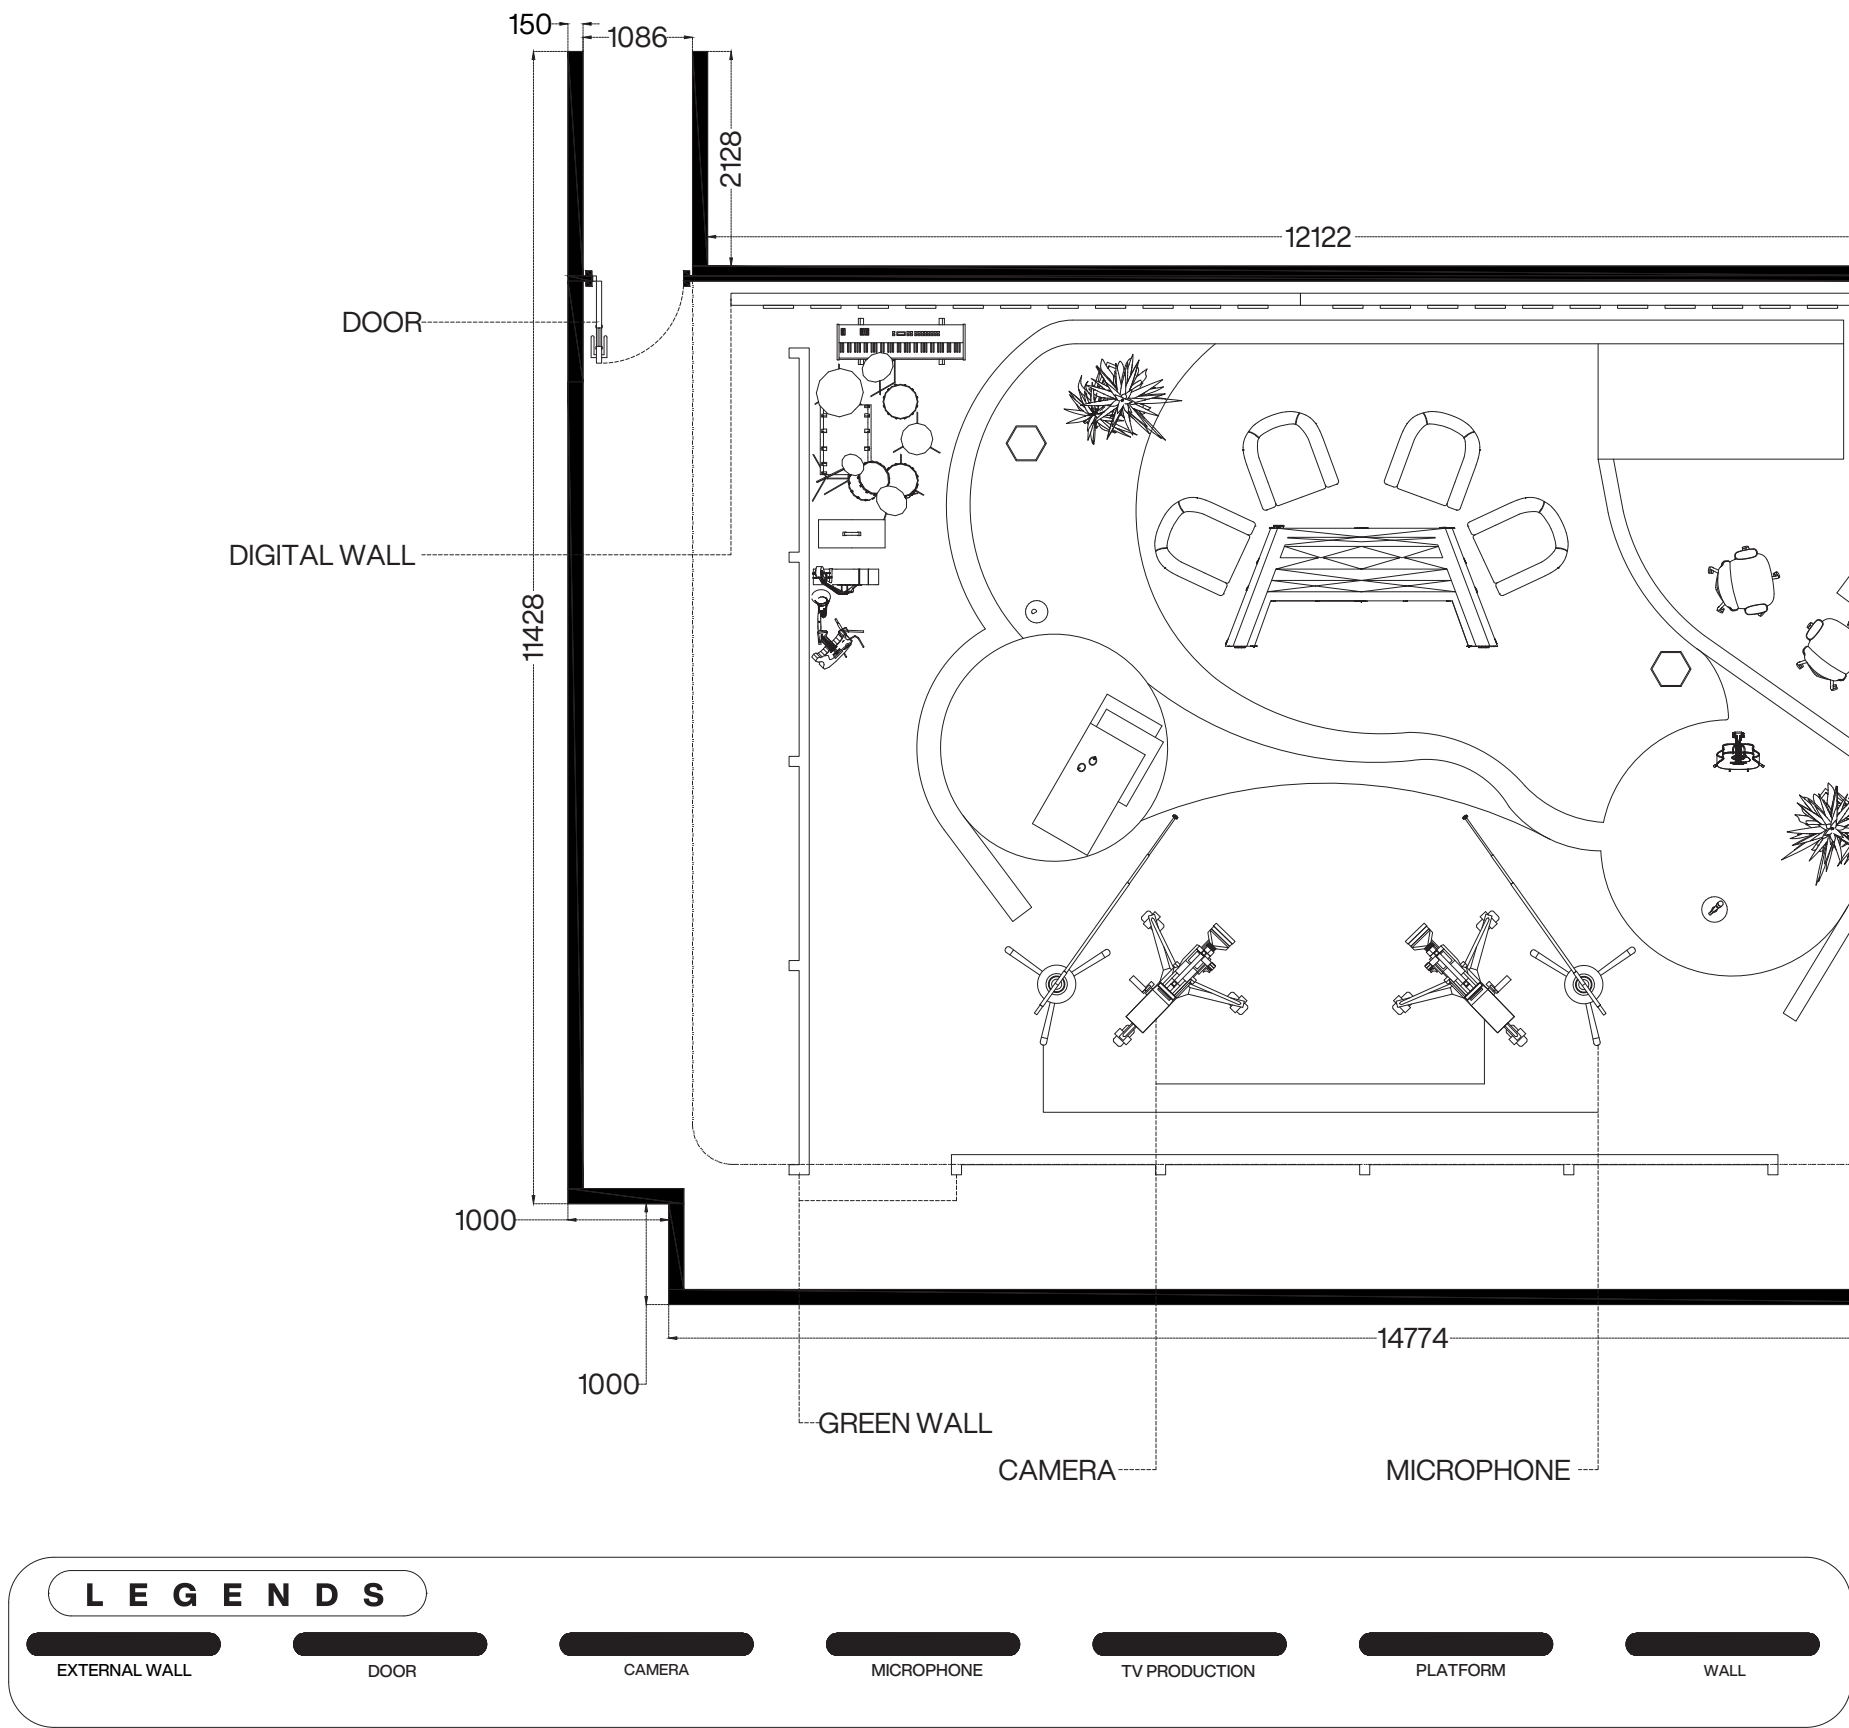

MODULE | PROJECT:

6CTA1094-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

FLOOR PLAN

UNIVERSITY LOGO | COMPANY CLIENT:

University of Hertfordshire **UH**

PAPER SIZE: A3
DATE: 03/10/2024

DRAWING No: 001
SCALE: 1:75

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

A

CHECKED BY:
LS

REVISION:

No.	DESCRIPTION	DATE

UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE:

[Signatures]

6CTA1094-0906-2024
"Lights, Camera, Build"

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

LIGHTING PLAN

University of Hertfordshire **UH**

DRAWING No: 002 SCALE: 1:75

A

REVISION:

1	2	3
4	5	6
7	8	9
10	11	12
13	14	15
16	17	18
19	20	21
22	23	24
25	26	27
28	29	30
31	32	33
34	35	36
37	38	39
40	41	42
43	44	45
46	47	48
49	50	51
52	53	54
55	56	57
58	59	60
61	62	63
64	65	66
67	68	69
70	71	72
73	74	75
76	77	78
79	80	81
82	83	84
85	86	87
88	89	90
91	92	93
94	95	96
97	98	99
100	101	102
103	104	105
106	107	108
109	110	111
112	113	114
115	116	117
118	119	120
121	122	123
124	125	126
127	128	129
130	131	132
133	134	135
136	137	138
139	140	141
142	143	144
145	146	147
148	149	150
151	152	153
154	155	156
157	158	159
160	161	162
163	164	165
166	167	168
169	170	171
172	173	174
175	176	177
178	179	180
181	182	183
184	185	186
187	188	189
190	191	192
193	194	195
196	197	198
199	200	201
202	203	204
205	206	207
208	209	210
211	212	213
214	215	216
217	218	219
220	221	222
223	224	225
226	227	228
229	230	231
232	233	234
235	236	237
238	239	240
241	242	243
244	245	246
247	248	249
250	251	252
253	254	255
256	257	258
259	260	261
262	263	264
265	266	267
268	269	270
271	272	273
274	275	276
277	278	279
280	281	282
283	284	285
286	287	288
289	290	291
292	293	294
295	296	297
298	299	300
301	302	303
304	305	306
307	308	309
310	311	312
313	314	315
316	317	318
319	320	321
322	323	324
325	326	327
328	329	330
331	332	333
334	335	336
337	338	339
340	341	342
343	344	345
346	347	348
349	350	351
352	353	354
355	356	357
358	359	360
361	362	363
364	365	366
367	368	369
370	37	


SIGNATURE: _____

[Handwritten signature]


CONTROLS FOR SPOTLIGHTS

SPOTLIGHTS FOR THE STAGE LIGHT-

LIGHT (BUILT IN MODEL)



ELECTRICAL PLAN

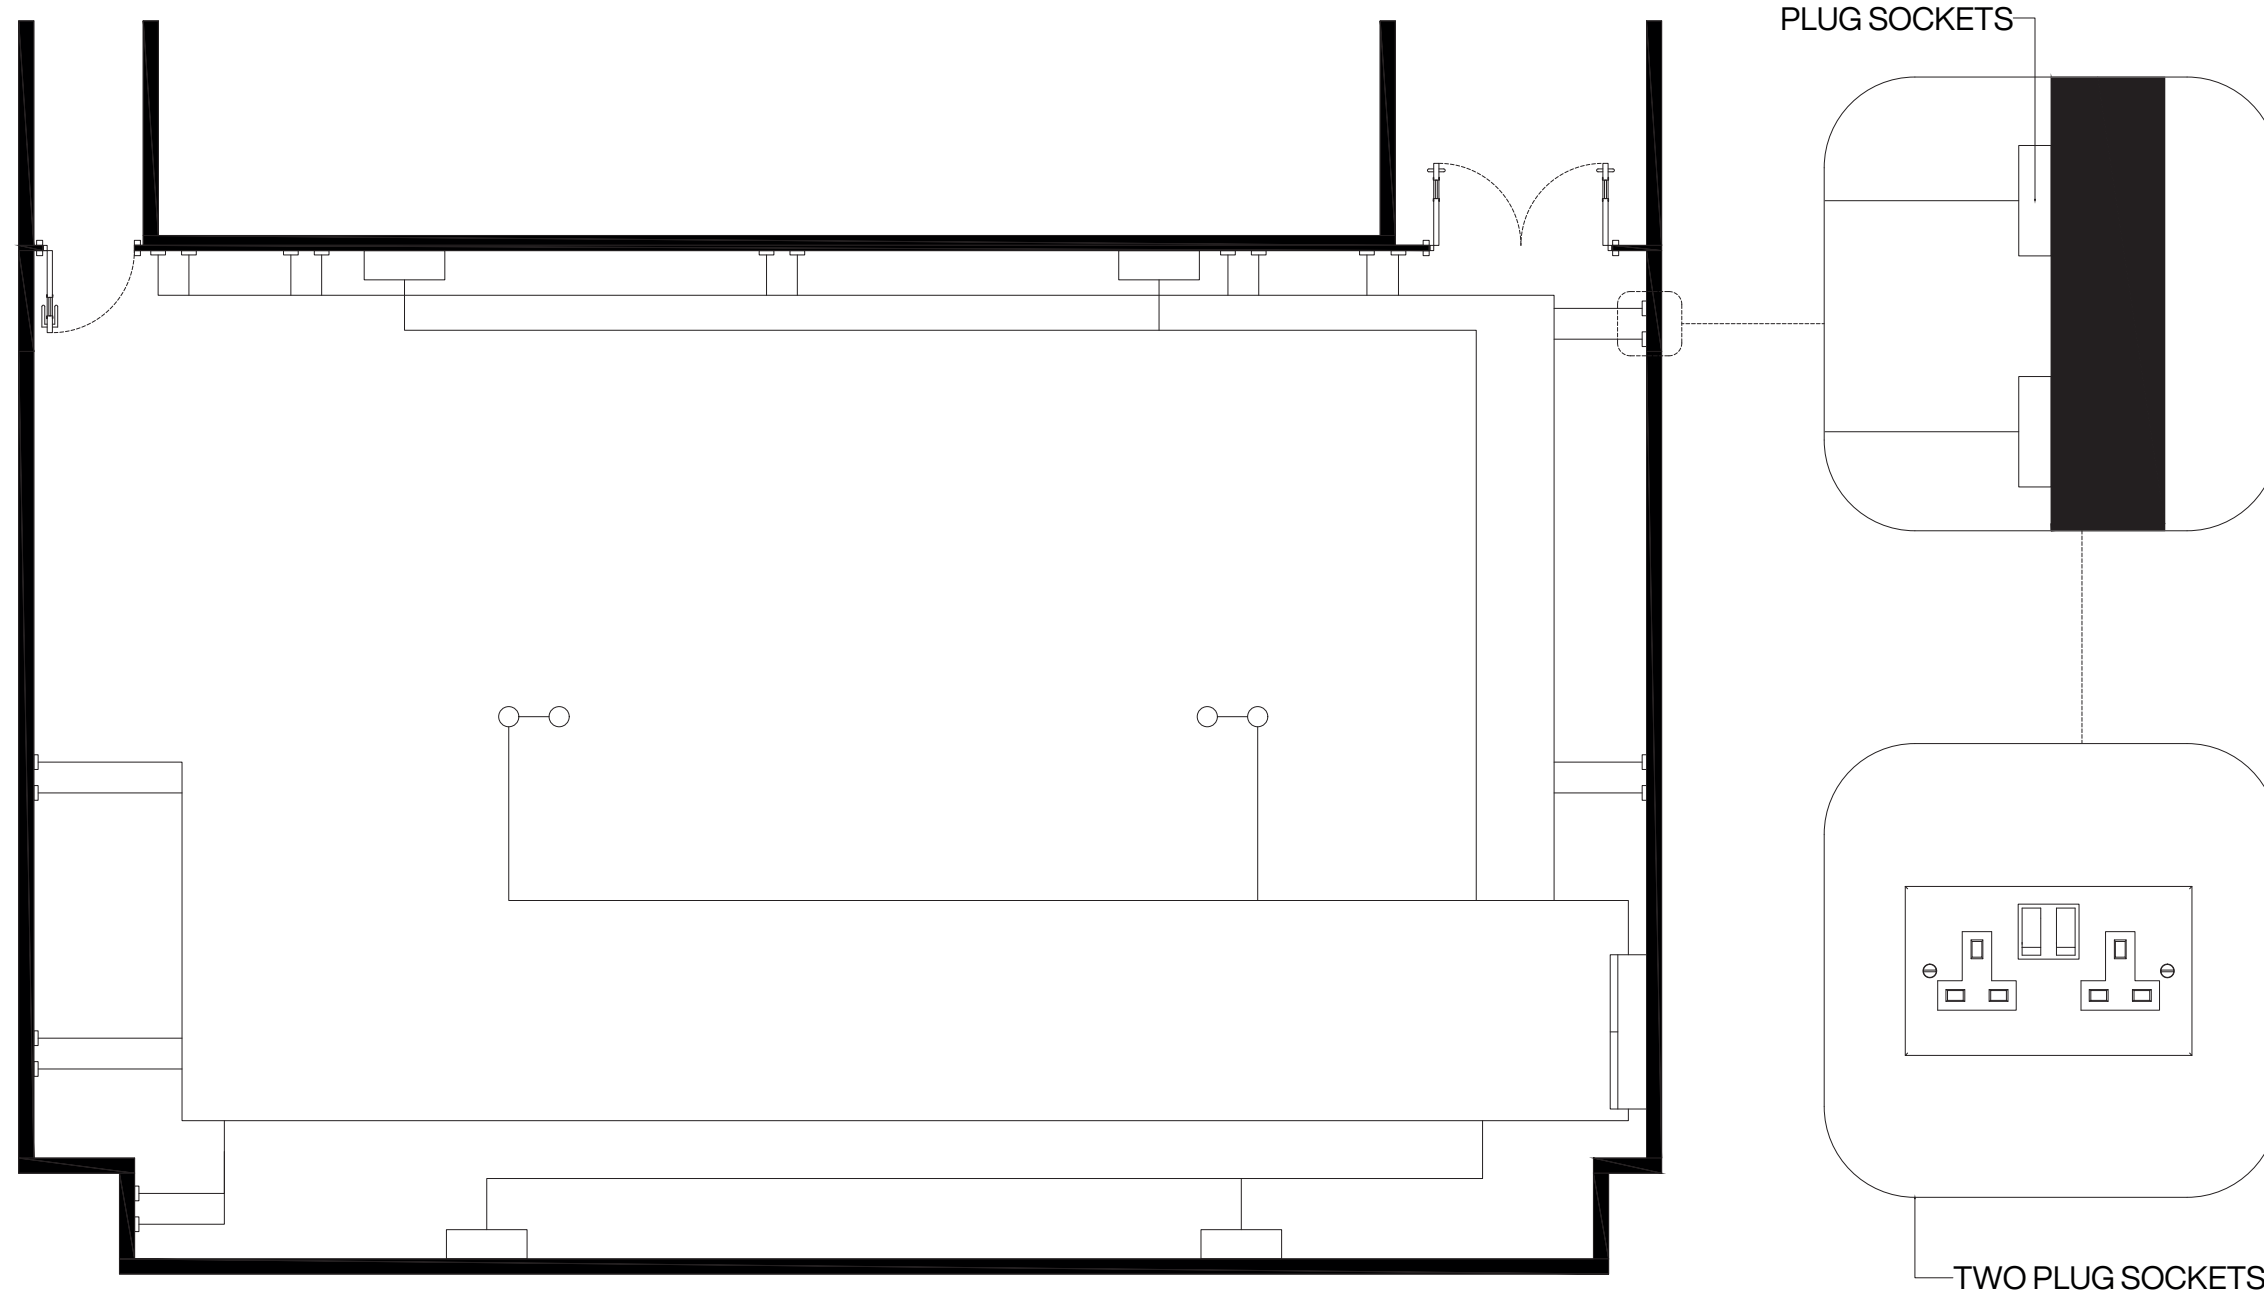

MODULE | PROJECT:

6CTA1094-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

ELECTRICAL PLAN

UNIVERSITY LOGO | COMPANY CLIENT:

University of Hertfordshire **UH**

PAPER SIZE: A3

DATE: 17/10/2024

DRAWING No: 003

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

A


CHECKED BY:
LS

REVISION:

[illegible]

UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE: _____



LEGENDS

EXTERNAL WALL

DOOR


POWER CONTROLS

FIRE ALARM | SMOKE
DETECTOR

AIR CONDITIONER

PLUG SOCKETS


FIRE SPRINKLERS






WALL AND FLOOR SECTION AND FINISHING PLAN

Bespoke Wall Detail Section

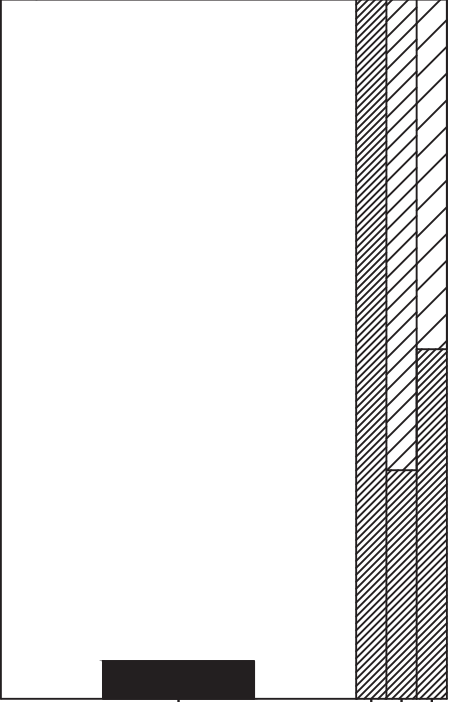

60mm protrusion
40mm protrusion
20mm protrusion
Floor Lighting

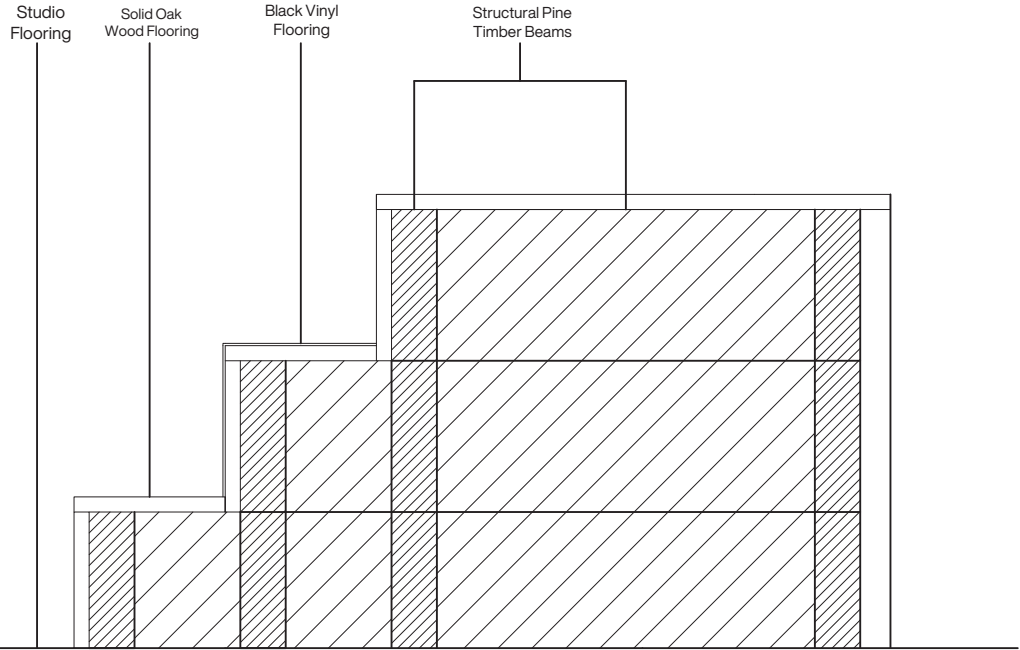

Studio Flooring
Solid Oak Wood Flooring
Black Vinyl Flooring
Structural Pine Timber Beams



MODULE | PROJECT:

6CTA1094-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

FLOOR AND WALL SECTION AND FINISHES PLAN

UNIVERSITY LOGO | COMPANY CLIENT:

University of Hertfordshire **UH**

PAPER SIZE: A3
DATE: 25/10/2024

DRAWING No: 004
SCALE: N/A

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

CHECKED BY:
LS


REVISION:

No.	DESCRIPTION	DATE



UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE:

[Handwritten signatures]



TECHNICAL WALL SECTION AND FLOOR PLAN

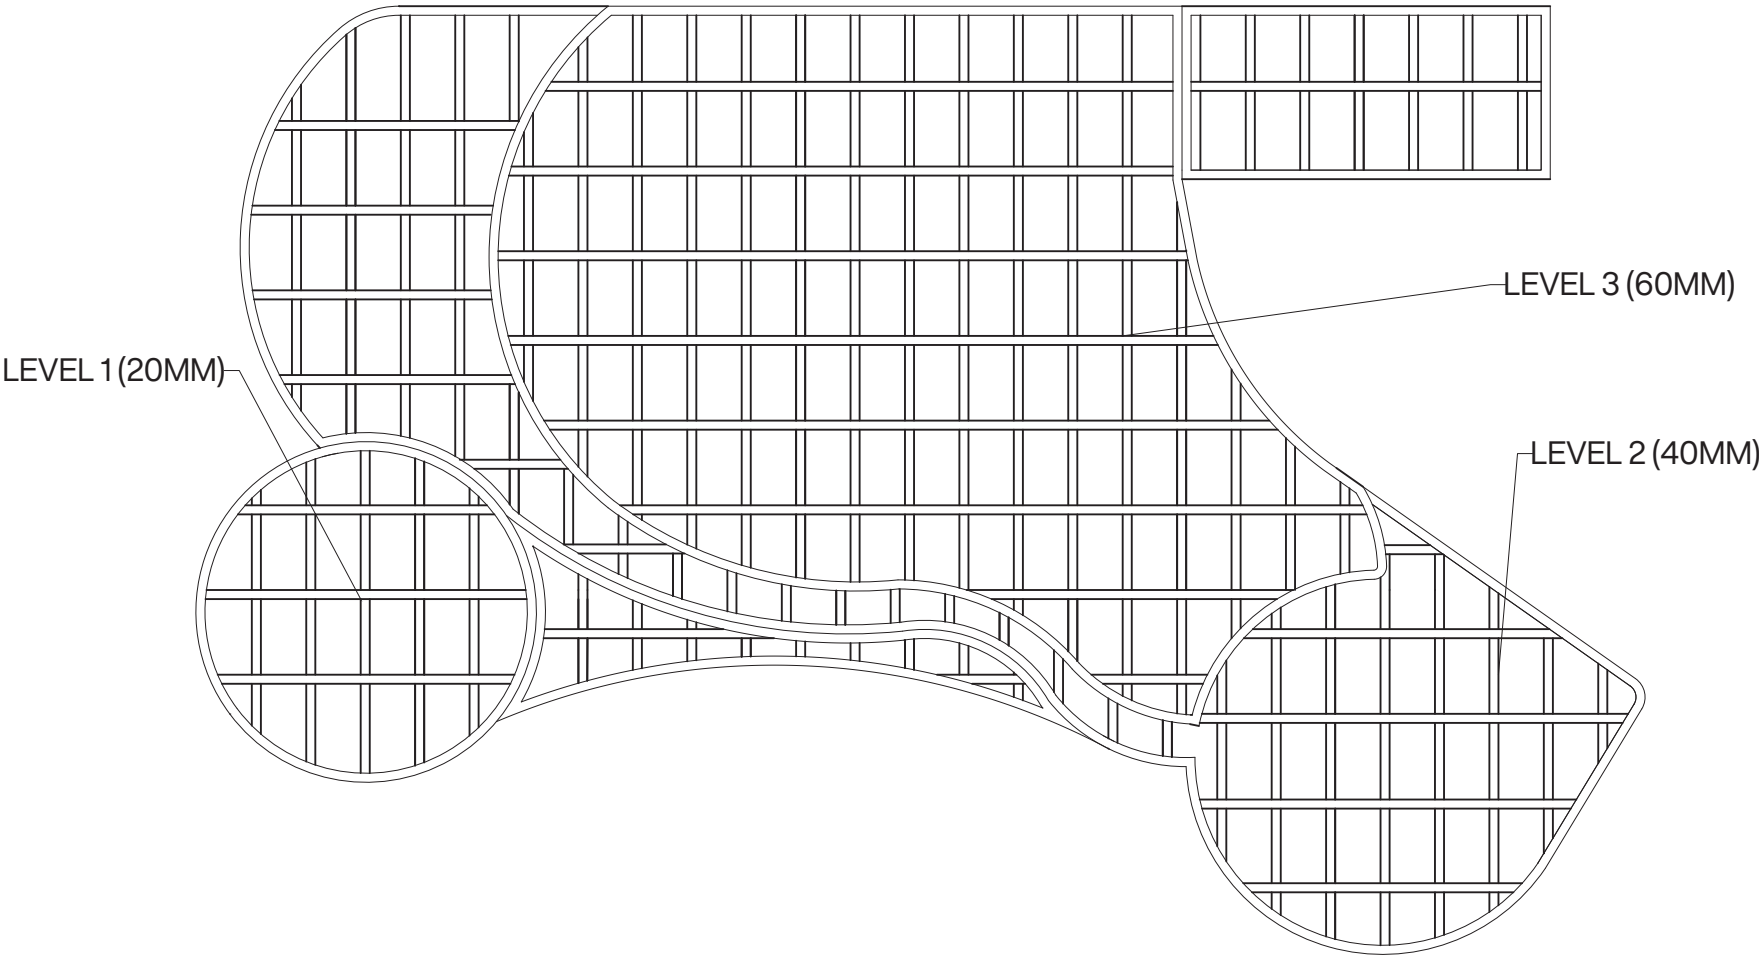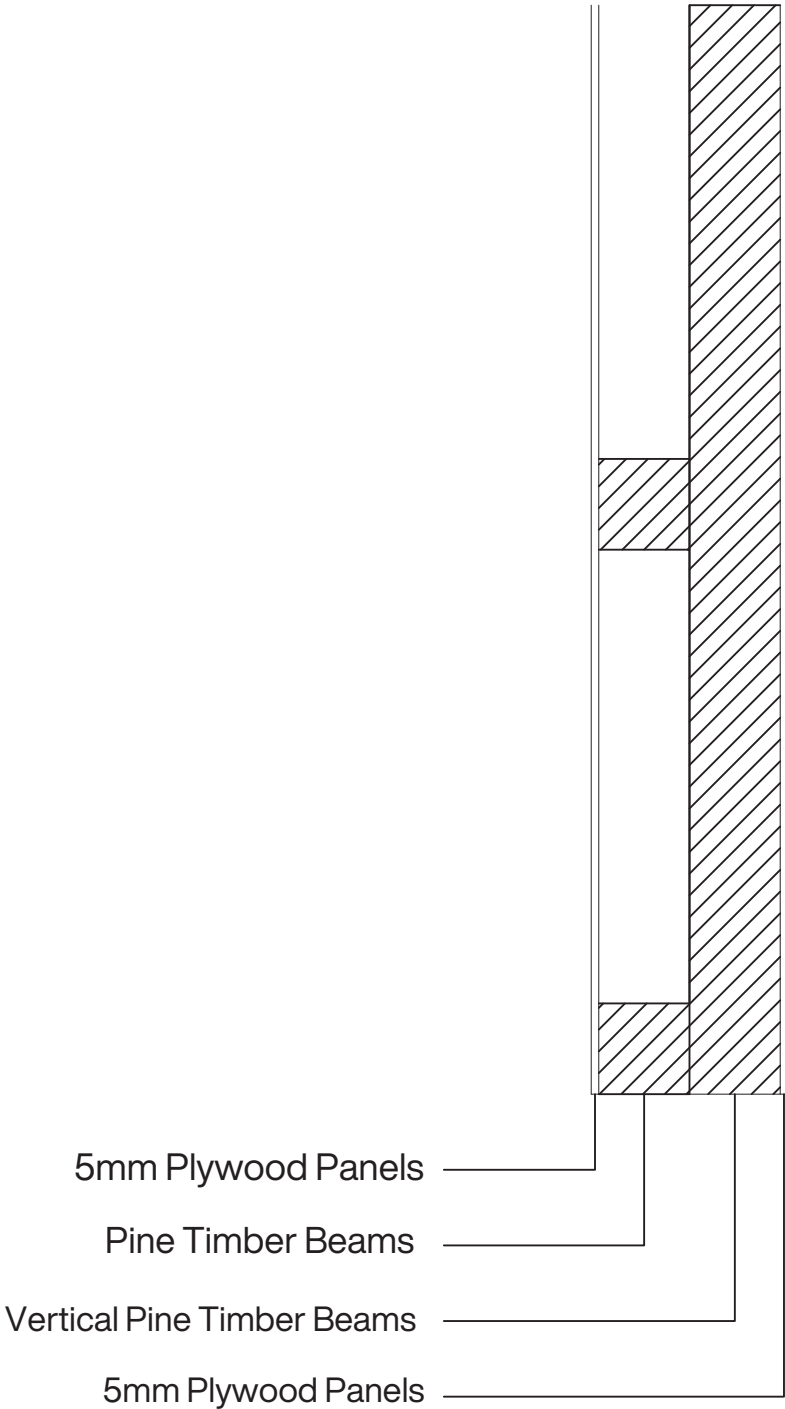

MODULE | PROJECT:

6CTA1084-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

Technical Wall Section and Floor Plan

UNIVERSITY LOGO | COMPANY CLIENT:

University of Hertfordshire **UH**

PAPER SIZE: A3
DATE: 09/12/2024

DRAWING No: 005
SCALE: 1:75

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

A


CHECKED BY:
LS


REVISION:

No.	DESCRIPTION	DATE

UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE:



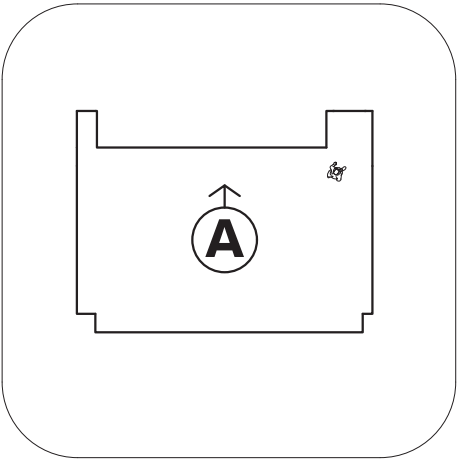

ELEVATION A



MODULE | PROJECT:

6CTA1094-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

ELEVATION A

UNIVERSITY LOGO | COMPANY CLIENT:

University of Hertfordshire **UH**

PAPER SIZE: A3 DATE: 27/10/2024

DRAWING No: 006 SCALE: 1:50

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

A

CHECKED BY:
LS



REVISION:


No.	DESCRIPTION	DATE

UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE:

(Handwritten signatures)

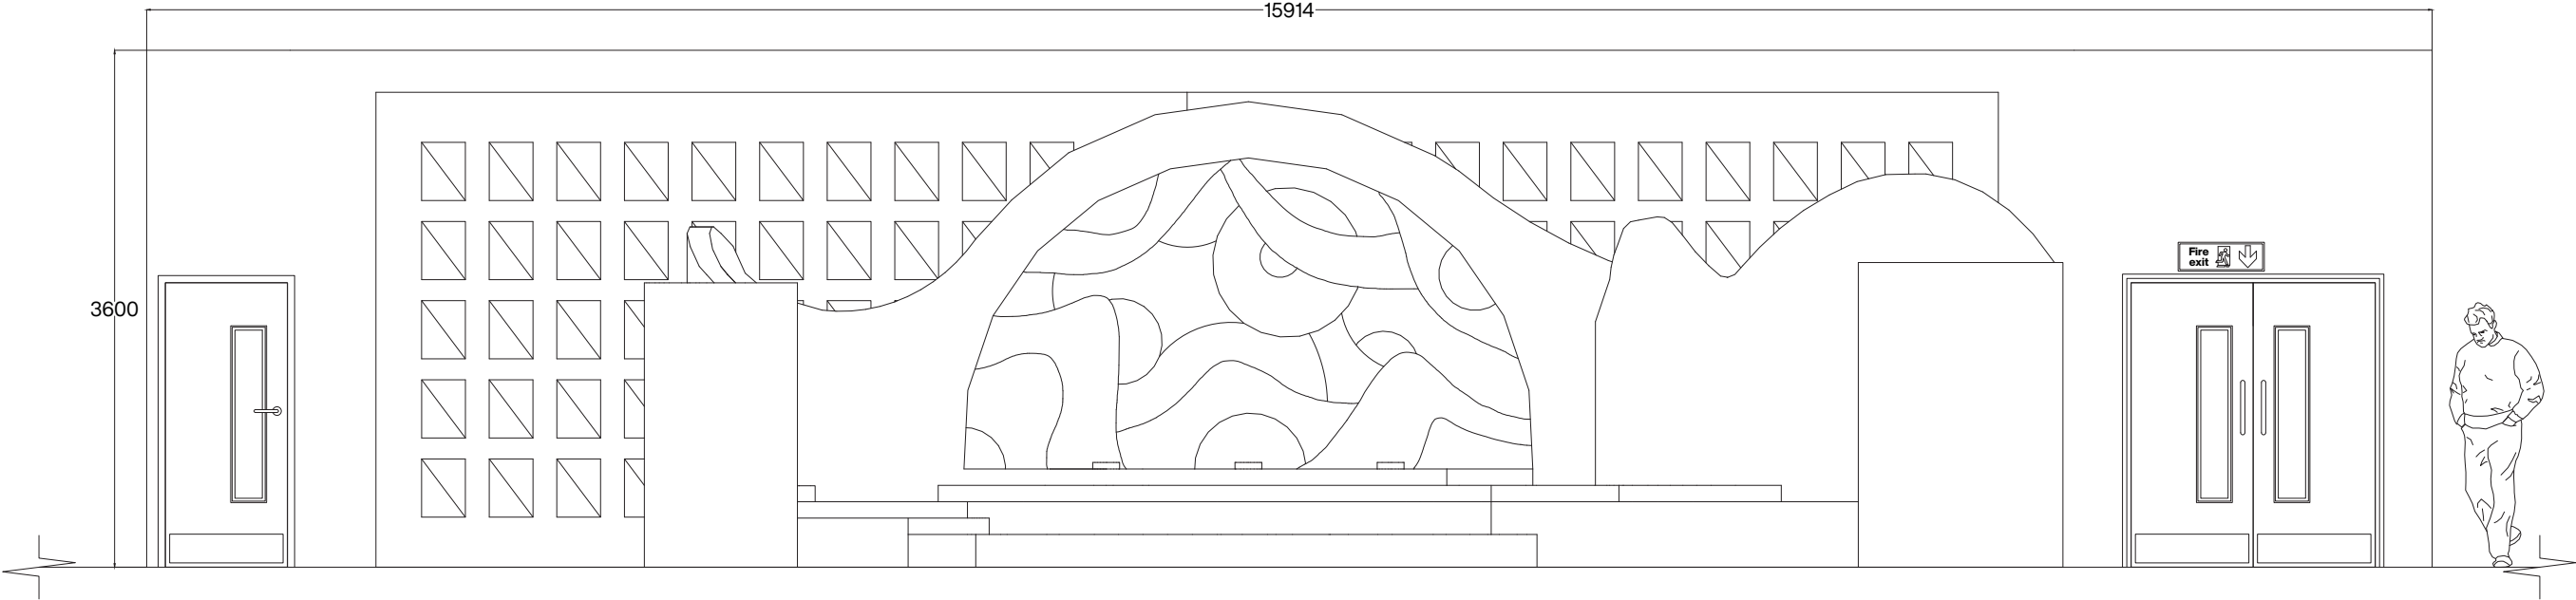

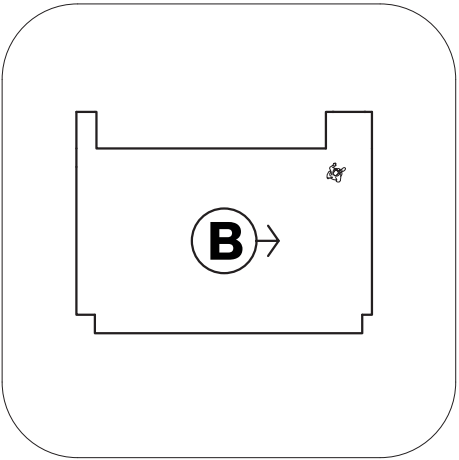

ELEVATION B



MODULE | PROJECT:

6CTA1094-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

ELEVATION B

UNIVERSITY LOGO | COMPANY CLIENT:

University of Hertfordshire **UH**

PAPER SIZE: DATE:
A3 27/10/2024

DRAWING No: SCALE:
007 1:50

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

A

CHECKED BY:
LS



REVISION:


No.	DESCRIPTION	DATE

UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE:

[Handwritten signatures]

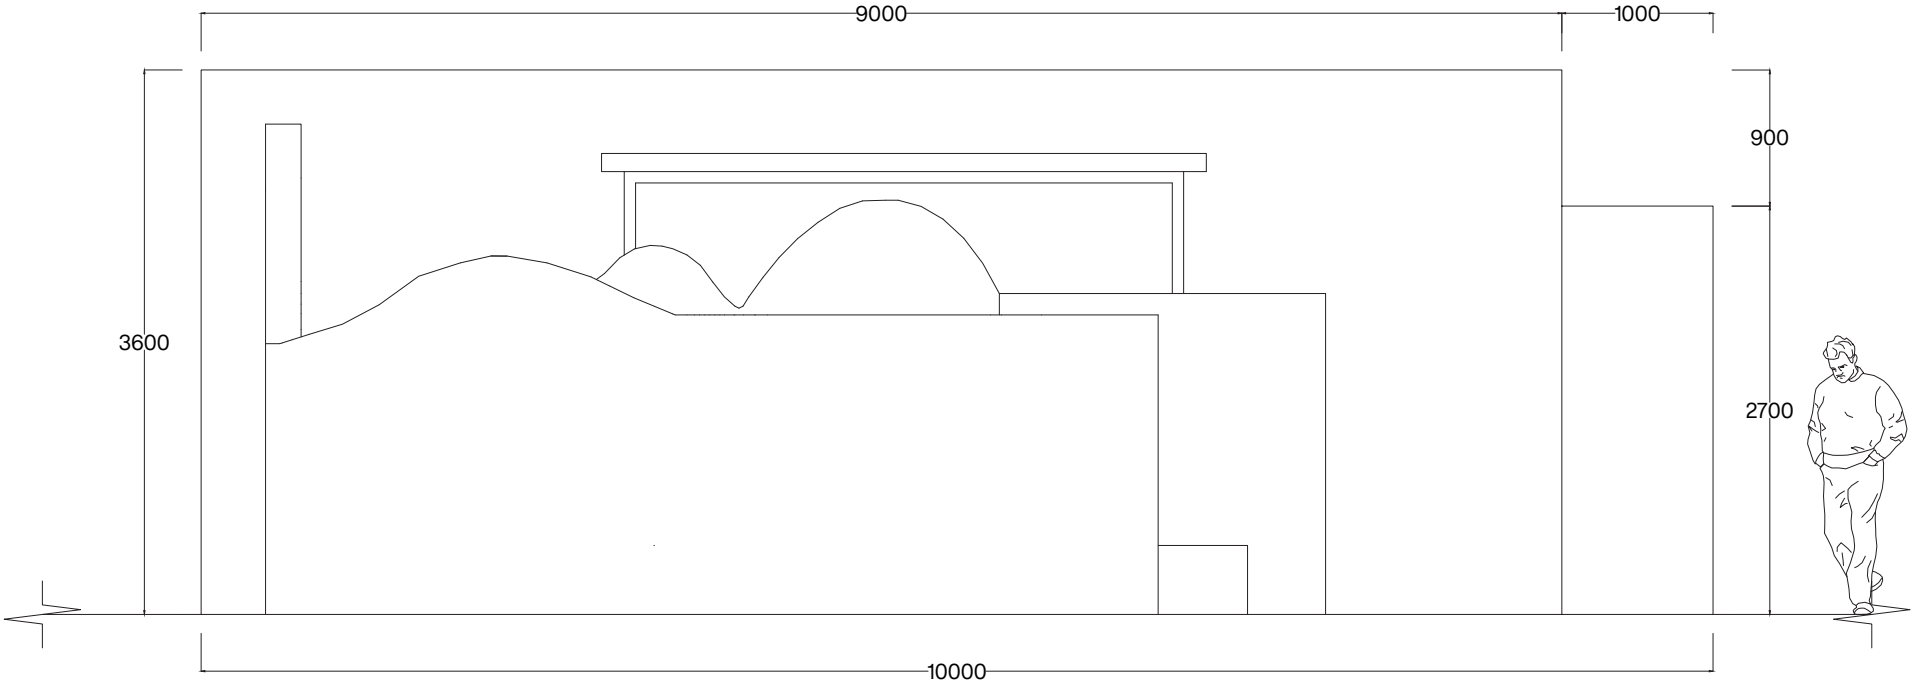

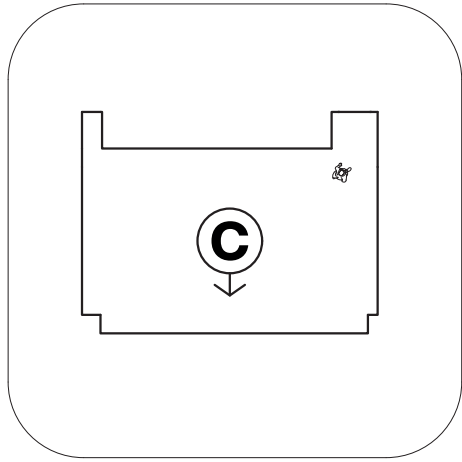

ELEVATION C



MODULE | PROJECT:

6CTA1094-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

ELEVATION C

UNIVERSITY LOGO | COMPANY CLIENT:



PAPER SIZE: A3
DATE: 27/10/2024

DRAWING No: 008 SCALE: 1:50

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

A

CHECKED BY:
LS


REVISION:


[illegible]

UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE: _____

[Handwritten signature] *[Handwritten signature]*



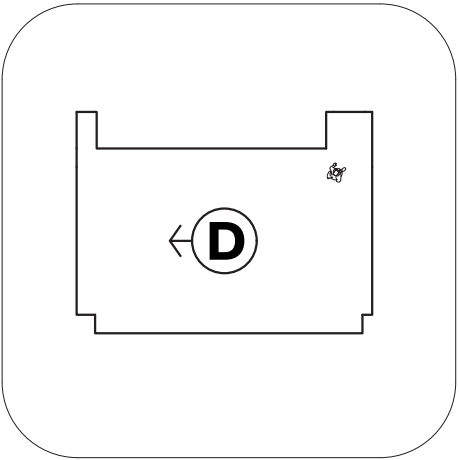

ELEVATION D



MODULE | PROJECT:

6CTA1094-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

ELEVATION D

UNIVERSITY LOGO | COMPANY CLIENT:

University of Hertfordshire **UH**

PAPER SIZE: A3
DATE: 27/10/2024

DRAWING No: 009
SCALE: 1:50

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

A

CHECKED BY:
LS



REVISION:


No.	DESCRIPTION	DATE
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE:

(Signatures)

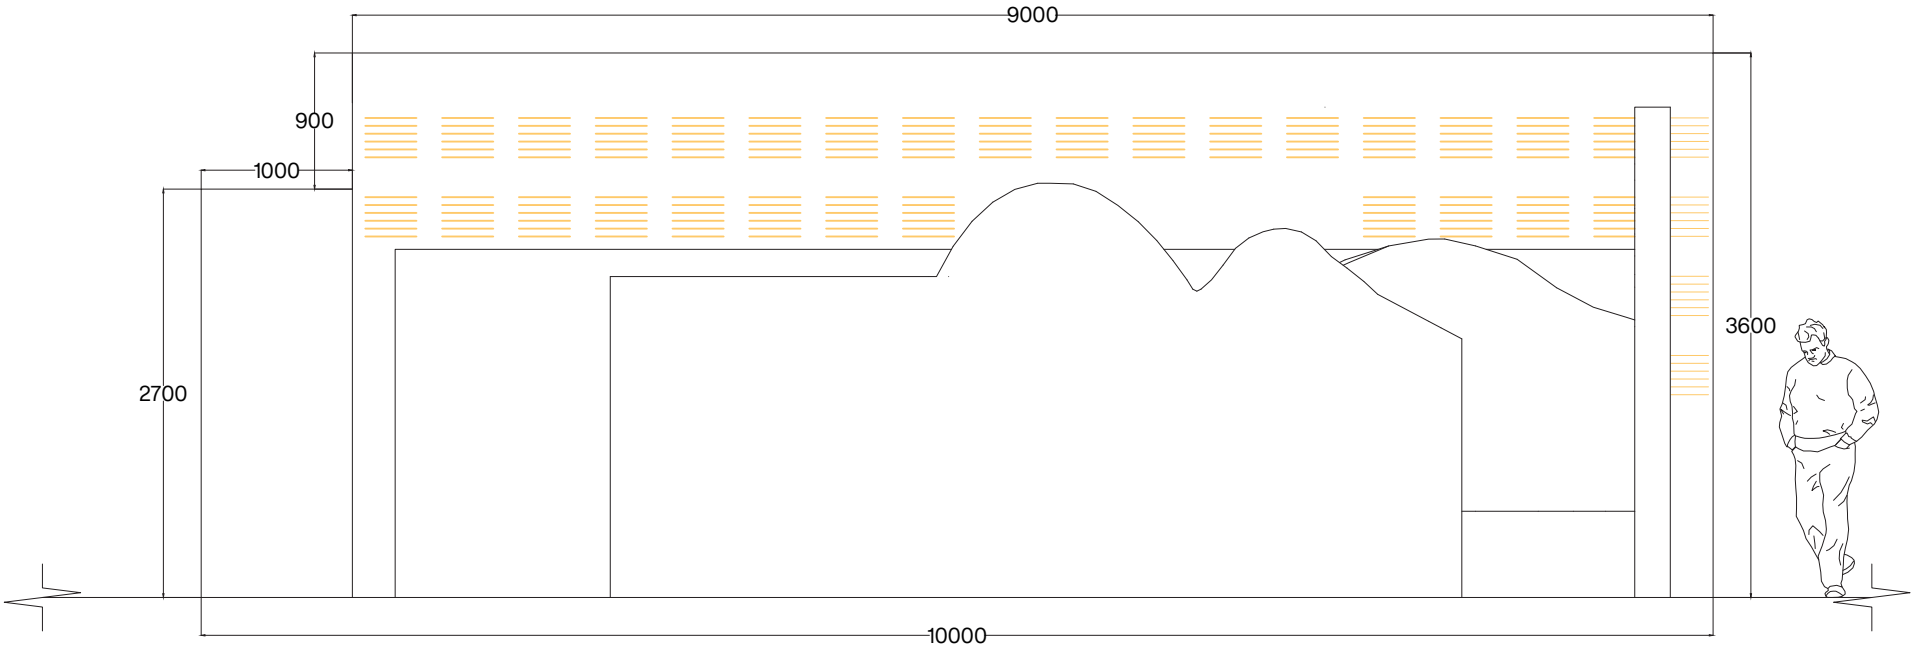

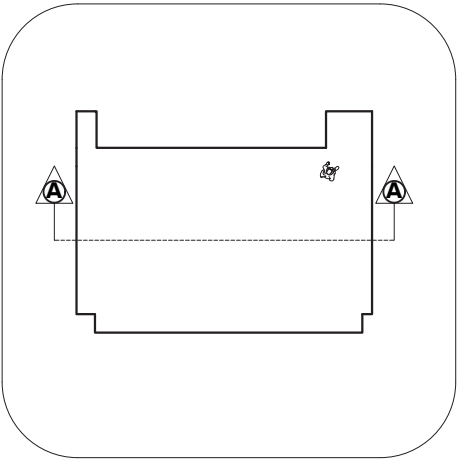

SECTION A-A



MODULE | PROJECT:

6CTA1094-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

SECTION A-A

UNIVERSITY LOGO | COMPANY CLIENT:

University of Hertfordshire **UH**

PAPER SIZE: A3
DATE: 30/10/2024

DRAWING No: 010
SCALE: 1:75

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

CHECKED BY:
LS



REVISION:


No.	DESCRIPTION	DATE

UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE:

[Handwritten signatures]

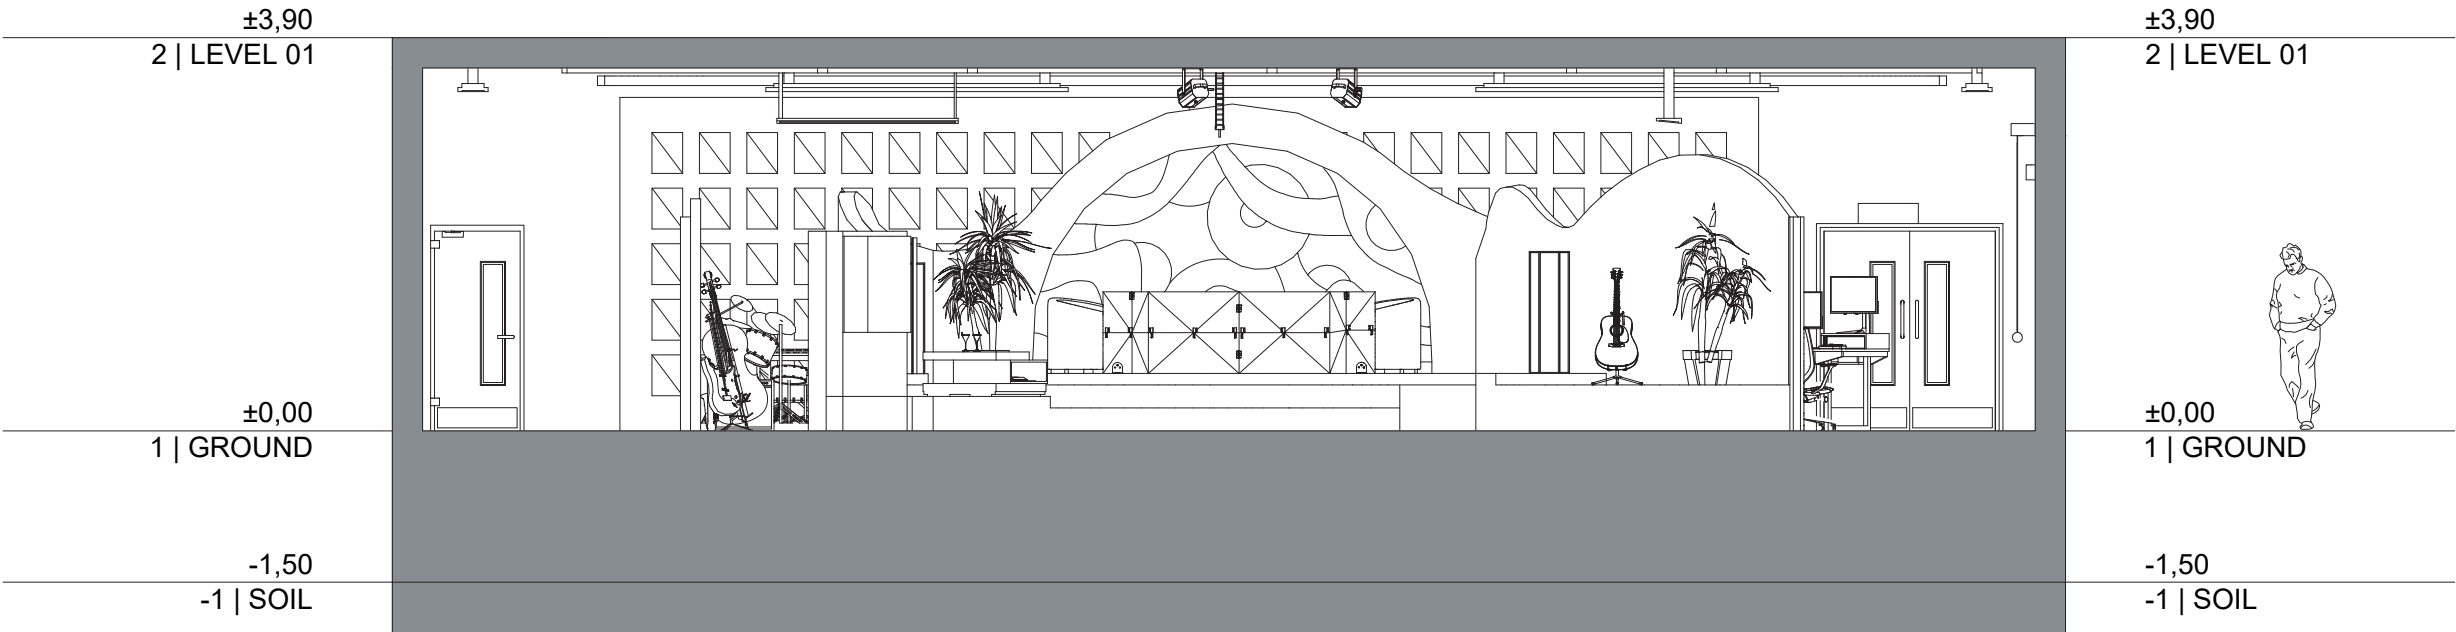

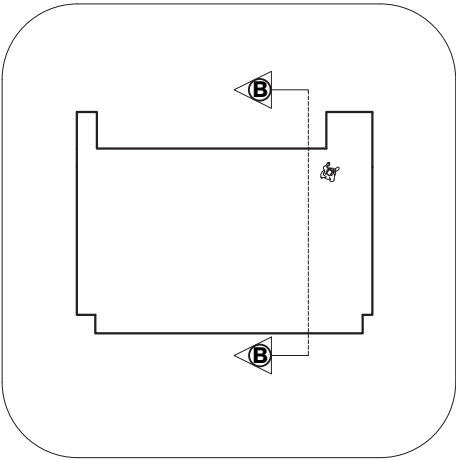

SECTION B-B



MODULE | PROJECT:

6CTA1094-0906-2024
"Lights, Camera, Build"

PROJECT ADDRESS | ROOM NAME:

University of Hertfordshire / Film, Music &
Media Building (FMM) | Room B09

DRAWING TITLE:

SECTION B-B

UNIVERSITY LOGO | COMPANY CLIENT:

University of Hertfordshire **UH**

PAPER SIZE: A3
DATE: 30/10/2024

DRAWING No: 011
SCALE: 1:75

DRAWN BY:
ADIL CHOWDHURY
TRAVIS HARDY
LOUIS WESTON
TYRESE FREDERICK

A

CHECKED BY:
LS



REVISION:

No.	DESCRIPTION	DATE

UNIVERSITY OF HERTFORDSHIRE
COLLEGE LN, HATFIELD, AL10 9AB

SIGNATURE:

(Handwritten signatures)

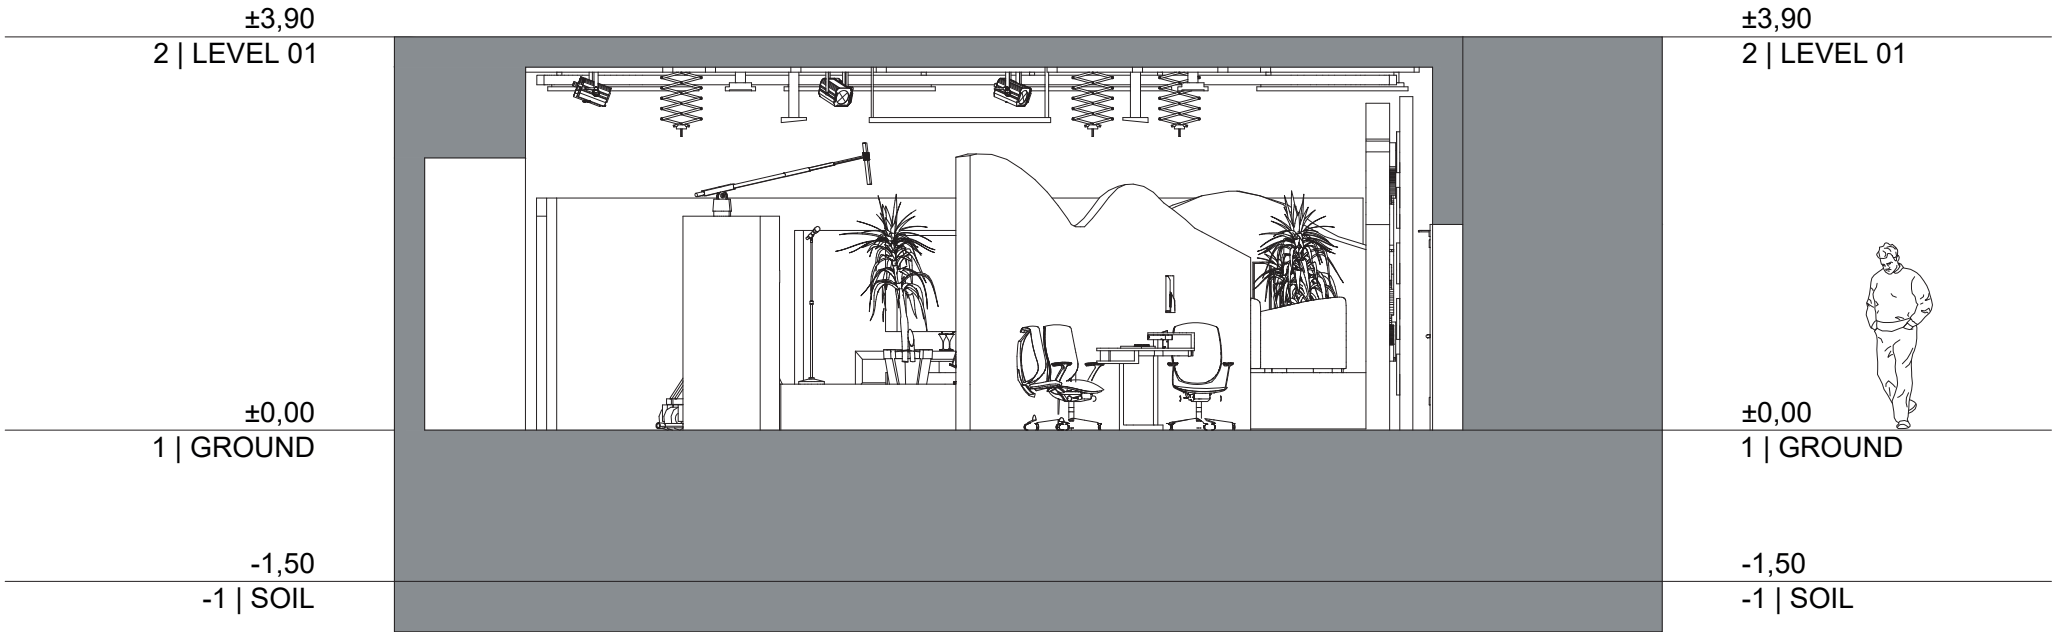

R E N D E R S










$$\int_{-\infty}^{\infty} e^{-x^2} dx = \sqrt{\pi}$$
$$f(x) = a_0 + \sum_{n=1}^{\infty} \left(a_n \cos \frac{n\pi x}{L} + b_n \sin \frac{n\pi x}{L} \right)$$
$$x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$
$$R = \frac{\sum_{i=1}^n (x_i - \bar{x})(x_i - \bar{y})}{\sum_{i=1}^n (x_i - \bar{x})^2}$$



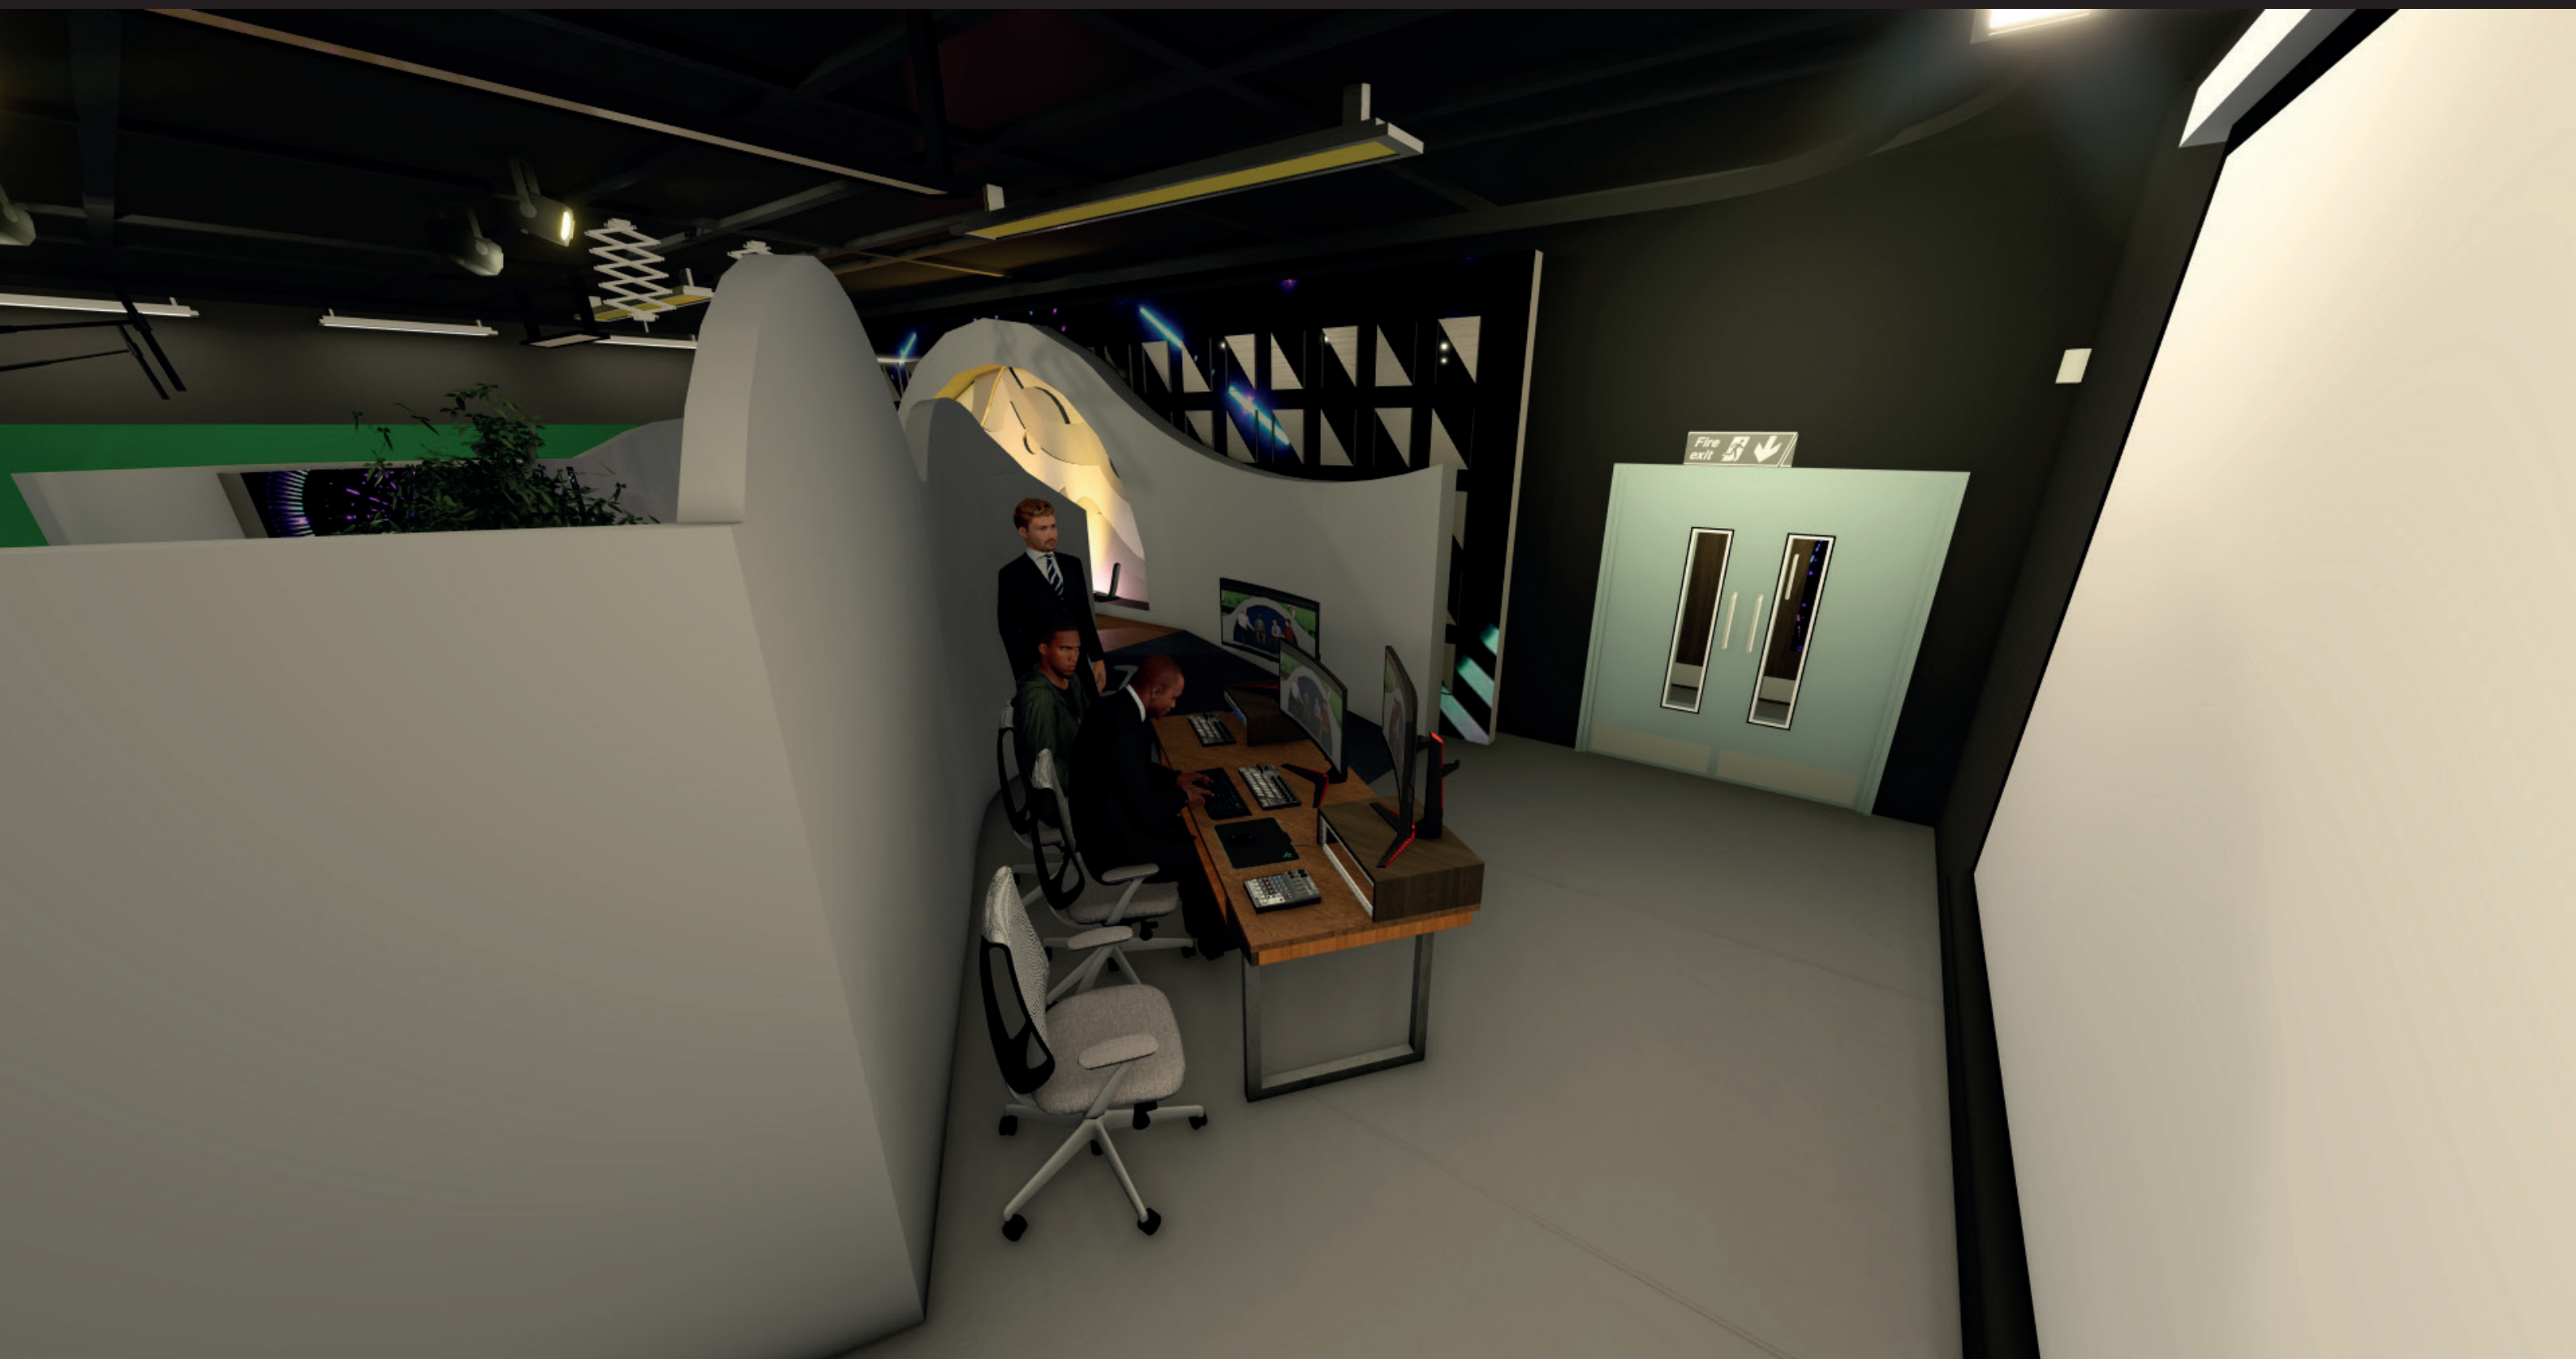

OVERVIEW OF THE SET

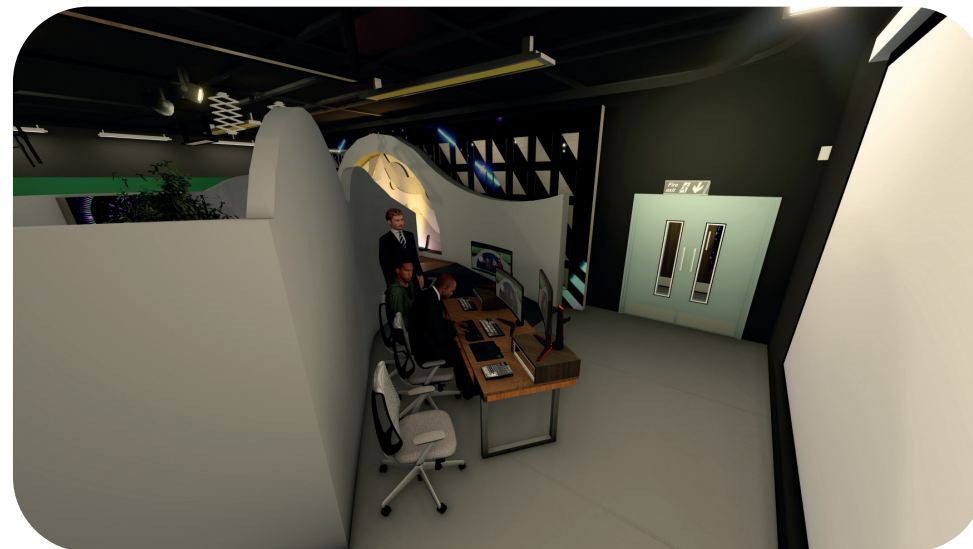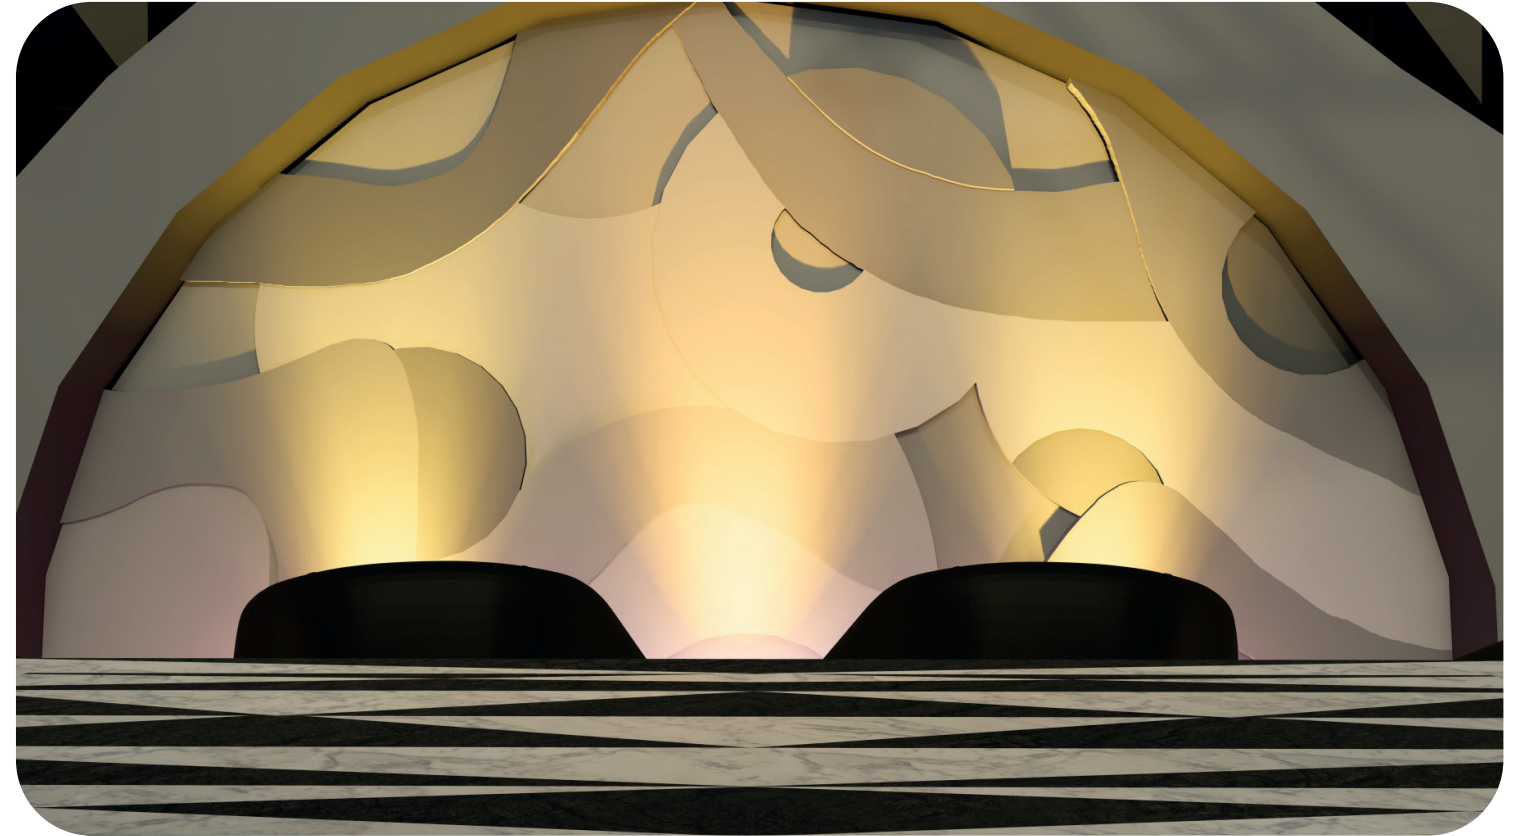



STORYBOARDS

The following will show different scenarios within all 3 different sets

THE MORNING SHOW



SHOT 1

Opening shot is a wide shot of the set showing all guest on screen while theme plays in the background



SHOT 2

Camera from shot one slowly pans in bringing the host and guest into centre frame as theme fades away



SHOT 3

Camera Two mid close shot of host introducing the show and guest



SHOT 4

Cut to Camera Three to introduce guest, mid close shot



SHOT 5


Back to Camera One to show host and guest



SHOT 6

Camera Two fixed on second host on the left side of set. Showing host and tv screen

INTELLECTUAL SHOW

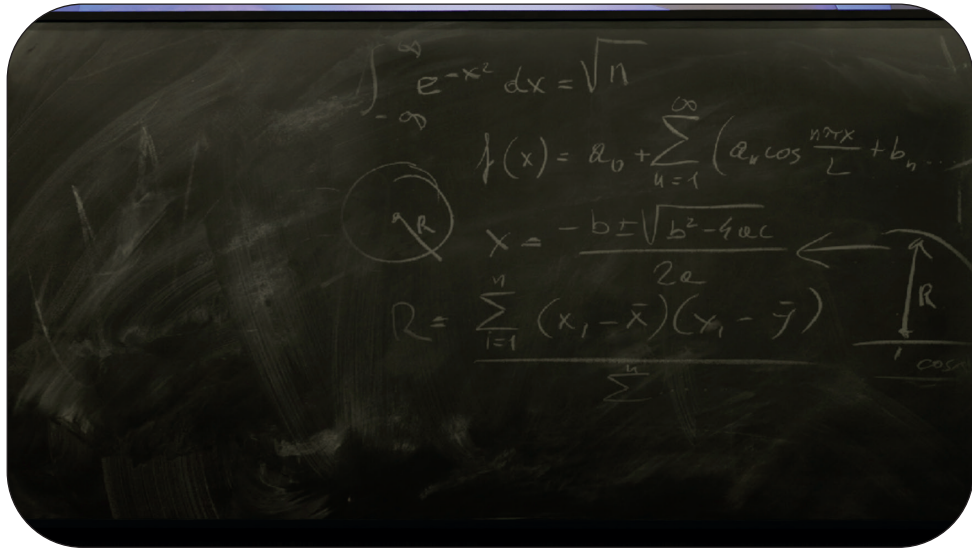

SHOT 1

Opening shot, close-up of question of the day on board



SHOT 2

Same camera pans out to reveal set & both host and guest in shot



SHOT 3

Camera Two showing mid close shot of host introducing show and guest



SHOT 4

Cut to Camera Three, mid close shot of guest after being introduced



SHOT 5

Back to Camera One wide shot of set



SHOT 6

Cut to Camera Two showing host

LATE NIGHT SHOW



SHOT 1

Opening shot of close up of the pianist playing opening theme on piano



SHOT 2

Same camera then follows over to the desk showing both host and both guest giving introductions



SHOT 3

Camera Two showing pianist with host giving him an introduction off shot



SHOT 4

Camera One, now fixed in wide shot of whole cast as opening theme fades away



SHOT 5

Camera Three showing hosts, mid close shot



SHOT 6

Camera Two now panned to guests, mid close shot

SPECIFICATION

For Group 6, a contemporary TV set that is intended to resemble a media room or a sleek, high-end sports movie needs a few key elements:

1. Television A minimum of 75 inches of ultra-high grade OLED screen for vibrant colours and deep blacks. - Frame: Minimal bezels to increase screen space and a matte black finish to reduce reflections.

2. Television Stand: Material: A sleek, low-profile stand made of black tempered glass or polished black metal. - Design: A floating design with hidden cable management is employed to keep cables hidden. Storage: Built-in drawers or shelves for media players and remote controls.

3. Backlighting: LED strip lights that may be coloured to match the tone or kind of content being displayed behind the TV (sports blue, for instance). Accent Lighting: Use wall sconces or movable lighting throughout the space to highlight the TV and create a dramatic effect. Ambient Lighting: Use smart controllers and dimmable ceiling lights to create the perfect ambiance.

4. Seating Location: Chairs/Couches: Modern, low-profile seats with cosy black leather or fabric that are tilted for optimal views. Setup: A coffee table in the centre of a semicircular arrangement makes for an engaging viewing experience.

5. Wall Design: Colour: Use dark matte paint (charcoal or deep blue) to create a striking background. Texture: Add a feature wall with textured paint or acoustic panels to enhance the sound quality and aesthetics. Art: Framed sports memorabilia or contemporary artwork that adds personality to the space without being intrusive.

6. Technology Integration: Sound System: A surround sound system or expensive soundbar integrated into the design for a rich audio experience. Smart Controls: Using a universal remote or a smart home connection, you can effortlessly control the TV's settings, lighting, and music.

7. Additional Components: - Intelligent Features: voice control connection with smart assistants for hands-free operation.

Curves, lines, and shapes are all used in the imaginative geometric design approach to create simple yet beautiful designs. It may be used in a variety of fields, including graphic design, interior design, and branding.

Key Components

Use LED/LCD panels with transparent glass or holographic films for transparent displays or holographic screens.

For making tiny grid boxes that can show material on their own, micro-LED screens are perfect. Hardware for Display Control: a controller system to operate individual screens.

To deliver signals to several monitors, use HDMI splitters and drivers. Networked Communication: To produce holographic content, incorporate a graphics processing unit (GPU) or central processing unit (CPU).

For communication between the CPU and grid displays, use Ethernet or Wi-Fi. Optional Projection System: Use holographic projection systems, such as light-field projectors, to create authentic "floating" holograms.

3D Content Generation: Programs like Unity 3D, Unreal Engine, or specially designed software that can

- produce holographic content.
- Power Supply: Ensure enough power to handle the grid screens with proper voltage regulation.
- Wiring Plan
- Power Distribution: Connect each grid box screen to a dedicated power supply.
- Use a central power management unit to prevent overloads.
- LOUIS'S BESPOKE GREEN SCREEN HOLOGRAM WALL SPECIFICTAION AND COST.
- My green hologram wall measures in at 3.675 m in height, 5.3 m in length, and 0.6 m in width. This is because it is often larger than an electrically metered box, which could include more wiring than is necessary.
 - UK Standard Surface Mounted Electric Meter Box - (596 x 410 x 220mm) UK Standard approved surface mounted electrical meter box. METERBOX - NSW Standard Meter Box (600mm x 600mm x 260mm).
 - Creating a hologram wall or box with smaller grid box screens involves combining advanced display technologies, precise wiring, and software integration. Here's a step-by-step guide to how you might set up such a system.
 - Mirrored green-line tiles may be added to my huge green screen wall to give the presenter a stunning holographic appearance. When processed in real-time, each square acts as a separate green screen, reflecting light to create unified images. Because of the exact square alignment, the image blends in perfect over the whole wall.
 - Complex compositing software maps live feeds or graphics onto each square while adjusting for depth and angles to create a holographic illusion.

Professional Specification and Cost Estimation for Custom Installation

Cameras must align with the screen's perspective. Tracking software ensures that the projected pictures vary dynamically when cameras move or zoom, preserving the impression of depth and continuity. LED backlighting or projection provides vibrancy, while precise lighting ensures that the presenter is evenly lit without affecting the chroma keying. An immersive experience is delivered by this system.

Project Overview

This standard describes the layout and approximate cost of a custom installation. The installation includes a centre unit that is 5.5 meters long and has an electrical wire box that is around 55 cm wide. The gadget will feature many smaller screens with half-light reflecting panels mounted on a vertical base. The wiring and component costs are approximated below based on average market prices.

Components and Costs

1. Electrical Wiring Box Installation
 - o Size: Approx. 55 cm wide; standard electrical box for multi-device wiring.
 - o Material & Installation Cost:
 - High-grade electrical enclosure: £120 - £200
 - Installation labor (including compliance with local regulations): £200 - £400
2. Wiring
 - o Type: Standard electrical wiring for commercial applications. Assuming 12-gauge copper wiring for powering multiple screens, LED backlighting, and auxiliary electronics.
 - o Length Estimate: Wiring required for 5.5m frame plus interconnections between screens and control

systems: ~50 meters.

- o Cost per Meter: Approx. £1.50 - £3.00/meter
- o Total Wiring Cost (Materials): £75 - £150
- o Labor for Wiring: Professional installation of wiring, ensuring proper routing and safety: £500 - £800
- 3. Screens with Half-Light Reflecting Panelling
 - o Screen Type: Standard desktop monitors with modified half-light reflecting paneling.
 - o Quantity: Estimated 10-15 screens depending on the spacing and layout.
 - o Cost per Unit (Screens): Approx. £300 - £500/screen
 - o Cost for Reflective Modification: Additional £50 - £100 per screen
 - o Total Screen Cost: £3,500 - £9,000
- 4. Vertical Stand
 - o Material: Aluminum or steel, custom-fitted to the dimensions of the frame.
 - o Cost: Custom fabrication and assembly: £1,000 - £2,500
- 5. Other Costs
 - o Cabling for Screens (HDMI/DisplayPort): £200 - £400
 - o Power Distribution Unit (PDU): Approx. £150 - £300
 - o Integration and Testing: Ensure all screens function cohesively with light-reflecting panels: £500 - £1,000

Summary of Estimated Costs

Item	Estimated Cost (Low)	Estimated Cost (High)
Electrical Wiring Box	£320	£600
Wiring (Materials & Labor)	£575	£950
Screens with Panelling	£3,500	£9,000
Vertical Stand	£1,000	£2,500
Cabling and PDU	£350	£700
Integration and Testing	£500	£1,000
Total Estimated Cost	£6,245	£14,750

Assumptions

1. Power Supply: Sufficient electrical capacity and existing infrastructure are assumed for installation.
2. Regulations: All wiring and installation adhere to local building codes and safety regulations.
3. Client Responsibility: Finalizing layout/design specifics and approving material choices.

Conclusion

This project provides a customised solution that strikes a balance between durability, style, and utility. The estimated total cost varies from £6,245 to £14,750 based on the number of screens, material selections, and customisation needs. Depending on the final specs and any new needs, this quote may change.

Specification and Cost Estimation for Ventilation and Power Management

Project Overview

The 5.5-meter-long structure with many displays needs effective power management and a simple ventilation system to function at its best and avoid overheating. The suggested parts, the installation procedure, and the approximate expenses are described in this specification.

Ventilation System Specification

1. Ventilation Fans
 - o Type: High-efficiency, low-noise exhaust fans.
 - o Quantity: Recommended 3-4 fans evenly distributed across the construct to ensure proper airflow.
 - o Size: 120mm or 140mm fans, depending on the construct's internal space.
 - o Features:
 - Brushless motors for durability.
 - Adjustable speed controls.
 - Noise reduction technology (<30 dB).
 - o Cost per Fan: Approx. £20 - £50
 - o Total Cost (Fans): £60 - £200
2. Airflow Ducts
 - o Material: Aluminum or PVC flexible ducts.
 - o Function: Guide airflow to critical areas, ensuring uniform cooling across all components.
 - o Cost per Meter: Approx. £5 - £15
 - o Length Estimate: 5-10 meters.
 - o Total Cost (Ducts): £25 - £150
3. Filters
 - o Type: Washable dust filters to prevent dust accumulation and improve air quality.
 - o Quantity: One filter per ventilation intake.
 - o Cost per Filter: Approx. £10 - £20
 - o Total Cost (Filters): £30 - £80
4. Temperature Sensors and Monitoring System
 - o Type: Basic thermal monitoring system with digital readout.
 - o Features: Real-time monitoring of internal temperature with alarms for overheating.
 - o Cost: Approx. £50 - £150
5. Professional Installation
 - o Includes mounting fans, routing ducts, and integrating the monitoring system.
 - o Labor Cost: £300 - £500

Power Management Specification

1. Power Supply and Distribution
 - o Power Supply Unit (PSU): Modular PSU with surge protection and sufficient wattage to power multiple screens and the ventilation system.
 - o Capacity: Recommended 1000W PSU with power efficiency certification (e.g., 80 Plus Gold or Platinum).
 - o Cost: Approx. £150 - £300
2. Power Distribution Unit (PDU)
 - o Type: Rack-mounted or standalone PDU with multiple outlets for evenly distributing power.
 - o Features: Circuit breakers for overload protection and built-in voltage stabilizers.
 - o Cost: Approx. £150 - £250
3. Cable Management
 - o Components: Clips, ties, and conduits to safely organize and route cables.
 - o Cost: Approx. £50 - £100
4. UPS (Optional)

- o Type: Uninterruptible Power Supply to protect against power outages and surges.
- o Capacity: 1500VA/1000W for sustained power backup.
- o Cost: Approx. £200 - £500

Summary of Estimated Costs			
Item	Estimated Cost (Low)		Estimated Cost (High)
Ventilation Fans	£60	£200	
Airflow Ducts	£25	£150	
Filters	£30	£80	
Temperature Sensors		£50	£150
Ventilation Installation		£300	£500
Power Supply Unit	£150	£300	
Power Distribution Unit		£150	£250
Cable Management	£50	£100	
Uninterruptible Power Supply (UPS)		£200	£500
Total Estimated Cost	£1,015	£2,230	

- Assumptions
1. Ventilation Design: Passive airflow complements active ventilation for efficient cooling.
 2. Electrical Requirements: The site has sufficient power infrastructure to support the PSU and PDU.
 3. Client Approvals: Specific brands or models will be finalized upon approval of this estimate.

Conclusion

The recommended ventilation and power control system ensures reliable operation, avoids overheating, and balances power usage. Depending on the specific choices and extras selected, the estimated price ranges from £1,015 to £2,230.

Product Specification List for New Studio Design

1. Electrical Switches
- Quantity: 3 switches in one box.
 - Specifications:
 - o Standard electrical switches for studio use.
 - o Material: Durable plastic with a matte finish.
 - o Features:
 - ▢ Soft-touch mechanism.
 - ▢ Rated for 16A for multi-device control.
 - ▢ Compatible with studio lighting and equipment.
 - o Estimated Cost per Unit: £10–£30.
 - o Total Cost: £30–£90.

2. Keyboards
- Quantity: 3 standard keyboards.
 - Specifications:
 - o Type: Wired or wireless (as preferred).
 - o Key Features:
 - ▢ Full-sized keyboard with numeric keypad.
 - ▢ Quiet, low-profile keys for minimal distraction.

- ▢ Plug-and-play compatibility with major operating systems.
- o Estimated Cost per Unit: £20–£50.
- o Total Cost: £60–£150.

3. Computer Mouses
- Quantity: 3 standard computer mouses.
 - Specifications:
 - o Type: Optical, wired or wireless.
 - o Key Features:
 - ▢ Ergonomic design.
 - ▢ Adjustable DPI (800–1600) for precision.
 - ▢ Plug-and-play compatibility.
 - o Estimated Cost per Unit: £10–£30.
 - o Total Cost: £30–£90.

4. 4K Monitors
- Quantity: 3 HD 4K monitors.
 - Specifications:
 - o Screen Size: 27 inches or larger.
 - o Resolution: 3840 x 2160 (4K UHD).
 - o Features:
 - ▢ IPS panel for wide viewing angles.
 - ▢ High color accuracy (HDR support preferred).
 - ▢ Adjustable stand with tilt and height control.
 - ▢ Multiple input options (HDMI, DisplayPort, USB-C).
 - o Estimated Cost per Unit: £400–£700.
 - o Total Cost: £1,200–£2,100.

5. Solid Wooden Desk
- Quantity: 1 standard long desk.
 - Specifications:
 - o Material: High-quality solid wood (oak, walnut, or similar).
 - o Dimensions: Approx. 2.5m x 0.8m (customizable).
 - o Finish: Smooth varnish for durability and aesthetics.
 - o Features:
 - ▢ Cable management grommets.
 - ▢ Reinforced legs for stability.
 - o Estimated Cost: £500–£1,000.

6. Ergonomic Desk Chairs
- Quantity: 3 high-quality chairs.
 - Specifications:
 - o Material: Mesh or leather with breathable backrest.
 - o Features:
 - ▢ Adjustable height, armrests, and lumbar support.
 - ▢ Swivel and tilt mechanisms.
 - ▢ High weight capacity (up to 300 lbs).

- o Estimated Cost per Unit: £200–£400.
- o Total Cost: £600–£1,200.

7. Leather Lounge Chairs

- Quantity: 4 comfortable leather chairs.
- Specifications:
- o Material: High-quality genuine or faux leather.
- o Features:
- Padded seat and backrest with ergonomic contouring.
- Sturdy base and armrests.
- Designed for comfort during extended interviews.
- o Estimated Cost per Unit: £300–£600.
- o Total Cost: £1,200–£2,400.

8. 4K Swivel Cameras

- Quantity: 2 high-end 4K cameras.
- Specifications:
- o Resolution: 4K UHD (3840 x 2160).
- o Features:
- Motorized swivel for full movement and tracking.
- Optical zoom (10x or higher).
- High dynamic range (HDR) for excellent lighting adaptability.
- HDMI and SDI output for professional setups.
- o Estimated Cost per Unit: £1,500–£3,000.
- o Total Cost: £3,000–£6,000.

9. Studio Microphones

- Quantity: 2 high-end microphones.
- Specifications:
- o Type: Condenser microphone with cardioid pickup pattern.
- o Features:
- High sensitivity and wide frequency range.
- Low self-noise for studio-quality recording.
- Shock mount and pop filter included.
- o Estimated Cost per Unit: £200–£500.
- o Total Cost: £400–£1,000.

10. Hue LED Spotlights

- Quantity: 8 high-end spotlights.
- Specifications:
- o Type: Smart LED spotlights with color and brightness control.
- o Power: 10W–15W per spotlight.
- o Features:
- Dimmable and tunable white light (2000K–6500K).
- Color-changing capabilities for creative lighting.
- Controlled via app or voice assistant.
- o Estimated Cost per Unit: £80–£150.

- o Total Cost: £640–£1,200.

11. LED Downlights

- Quantity: 3 Hue LED downlights.
- Specifications:
- o Type: Recessed smart LED downlights.
- o Power: 10W–15W.
- o Features:
- Dimmable and color temperature adjustment.
- Smart control via app or voice assistant.
- o Estimated Cost per Unit: £50–£100.
- o Total Cost: £150–£300.

Summary of Costs

Item	Quantity	Estimated Cost (Low)		Estimated Cost (High)
Electrical Switches	1 box	£30	£90	
Keyboards	3	£60	£150	
Computer Mouses	3	£30	£90	
4K Monitors	3	£1,200	£2,100	
Solid Wooden Desk	1	£500	£1,000	
Ergonomic Desk Chairs	3	£600	£1,200	
Leather Lounge Chairs	4	£1,200	£2,400	
4K Swivel Cameras	2	£3,000	£6,000	
Studio Microphones	2	£400	£1,000	
Hue LED Spotlights	8	£640	£1,200	
LED Downlights	3	£150	£300	
Total Estimated Cost		£7,810	£15,530	

Notes

- Every item on the list satisfies professional studio quality requirements and is made for long-term performance and durability, the final price may vary depending on supplier pricing, customisation, and brand selection.

1. High-End Wooden Coffee Table

- Quantity: 1
- Specifications:
- o Material: Solid wood (oak, walnut, or mahogany).
- o Dimensions: Approx. 1.2m x 0.6m x 0.4m (L x W x H).
- o Features:
- Smooth varnished finish for durability.
- Sleek, minimalist design with optional storage space underneath.
- o Estimated Cost: £400–£800.

2. Hue Standing Lamp

- Quantity: 1

- Specifications:
 - Type: Smart floor lamp.
 - Height: Approx. 1.5m to 2m.
 - Features:
 - Adjustable brightness and color temperature (2000K–6500K).
 - App and voice control (compatible with smart home systems).
 - Modern, elegant design to complement studio aesthetics.
- Estimated Cost: £150–£300.

3. Large Standing Plants

- Quantity: 2
- Specifications:
 - Type: High-quality artificial or real plants (e.g., fiddle leaf fig, monstera).
 - Height: 1.5m to 2m.
 - Planters: Decorative pots made of ceramic or metal for stability.
 - Features: Adds a natural and calming aesthetic to the studio space.
- Estimated Cost per Plant (with Planter): £150–£300.
- Total Cost: £300–£600.

4. Standing Guitar (Prop)

- Quantity: 1
- Specifications:
 - Type: Acoustic or electric guitar.
 - Features:
 - Realistic high-end guitar with a wooden body for aesthetic appeal.
 - Accompanied by a sturdy, adjustable stand for safe display.
 - Option for custom finishes to match studio design.
- Estimated Cost (with Stand): £200–£500.

5. Standing Tall Side Tables

- Quantity: 2
- Specifications:
 - Material: Solid wood or metal frame with a wooden top.
 - Dimensions: Approx. 0.5m x 0.5m x 0.7m (L x W x H).
 - Features:
 - Modern, compact design for holding small items (e.g., microphones, decor).
 - Sturdy construction with non-slip bases.
- Estimated Cost per Table: £100–£250.
- Total Cost: £200–£500.

Summary of Costs for Additional Items

Item	Quantity	Estimated Cost (Low)	Estimated Cost (High)
------	----------	----------------------	-----------------------

High-End Wooden Coffee Table	1	£400	£800
Hue Standing Lamp	1	£150	£300
Large Standing Plants	2	£300	£600
Standing Guitar (Prop)	1	£200	£500
Standing Tall Side Tables	2	£200	£500
Total Additional Cost		£1,250	£2,700

Updated Total Cost for Studio Design

- Previous Total Cost: £7,810–£15,530.
- New Total Cost (Including Additional Items): £9,060–£18,230.

Louis's Professional Specification for Bespoke Folding Table Design and Cost Estimate

Client Specification: Bespoke Folding Table

Design Overview

A custom folding table designed to feature:

- Length: 3 meters across the main tabletop.
- Width: 1.3 meters at the widest point; narrows to 80cm in the middle section, which measures 2 meters in length.
- Side Protrusions: Two side bars measuring 50cm in length and 32cm in width.
- Folding Mechanism: Table folds upwards from the platform beneath it, using specialized hinges and support brackets.
- Materials:
 - Dark Wooden Oak: Used for side panels, alternating slats, and joints.
 - Dark Walnut Epoxy Finish: Resin-enhanced wood for the smooth, beautiful tabletop finish.

Specifications and Material Costs

1. Table Materials

Material	Description	Quantity	Cost Per Unit	Total Cost
Dark Wooden Oak	Side panels, slats, and joints (premium grade)	~2.5m ²	£100/m ²	£250
Dark Walnut Epoxy	Tabletop (premium resin finish)	~4m ²	£150/m ²	£600
Wood Resin (Epoxy)	Smooth resin topcoat (for a flawless finish)	~5 liters	£60/liter	£300

2. Folding Mechanism Components

Component	Description	Quantity	Cost Per Unit	Total Cost
180° Flip-top Hinges	High-quality folding hinges	6	£20	£120
90° Folding Hinges	Stable folding hinges for support	4	£25	£100
Leg Support Brackets	Adjustable, durable support brackets	4	£35	£140

3. Labor and Finishing Costs

Task	Description	Estimated Hours	Hourly Rate	Total Cost
------	-------------	-----------------	-------------	------------

Woodworking	Cutting, shaping, and finishing wood	15 hours	£40/hour	£600
Epoxy Coating and Polishing	Applying resin and polishing	10 hours	£50/hour	£500
Assembly and Installation	Attaching hinges and folding system	8 hours	£40/hour	£320

4. Miscellaneous

Additional Costs	Description	Quantity	Cost Per Unit	Total Cost
Hardware Screws/Bolts	Premium grade for hinges	1 set	£30	£30
Shipping and Handling	Transport of materials and table	-	£150	£150

Total Cost Summary

Category	Total Cost
Table Materials	£1,150
Folding Mechanism	£360
Labor and Finishing	£1,420
Miscellaneous Costs	£180
Final Total Cost	£3,110

Travis’s Flooring and BESPOKE Wall Design Specification

Product Description	Dimensions/Details	Price Per Unit	Pack Price (if applicable)	Total Estimated Cost
Cool Coal Black & Blush Vinyl Flooring		£8.95 per metre squared.	£8.95/m ²	N/A Dependent on area specified.
Antique Solid Oak Wood Flooring	18mm x 125mm,	£71.52 per metre squared.	£71.52/m ²	£157.34 per pack (including VAT) Dependent on area specified.
Suspended Timber Flooring (4x PSE Planed Pine Timber)		£1.75 per metre squared.	Measurement (94x20). £1.75/m ²	N/A £550.00 55m ²
Flexible Plywood (Long Grain)	5mm thick, 2440mm x 1220mm.	Excluding VAT: £22.52.	Including VAT: £27.02.	£27.02 per sheet N/A Dependent on quantity needed.
Bespoke Protruding Background Wall Design	Made of PVC grey plastic sheet material.	5mm thick.		
Each sheet: 1000mm x 100mm.	Final dimensions: 4000mm x 2000mm.	£40.88 per sheet	N/A	£3,270.40 (80 sheets total).

Notes:

- All prices include VAT where applicable unless otherwise stated.
- Quantities and total costs should be confirmed based on the client’s specific requirements.

Black Vinyl Flooring:
(no date) Cool coal black 599 blush vinyl flooring, Online Carpets. Available at: https://www.onlinecarpets.co.uk/products/cool-coal-black-599-blush-vinyl-flooring?tw_source=google (Accessed: 09 December 2024).

Oakwood floor:
125mm lacquered antique square peg solid oak wood flooring 2.20m2 (no date) Ambience Hardwood Flooring. Available at: <https://www.ambiencehardwoodflooring.co.uk/125mm-lacquered-antique-square-peg-solid-oak-wood-flooring-2-20m.html> (Accessed: 09 December 2024).

Suspended Timber wood:
4x1 PSE planed pine timber (94x20) only £1.75 per Meter Inc vat! (no date) Timber4Less. Available at: <https://www.yorkshiretimber.co.uk/products/4x1-pse-planed-pine-timber-94x20-only-0-85-per-meter-inc-vat> (Accessed: 09 December 2024).

Plywood:
5mm flexible plywood long grain 2440mm x 1220mm (8’ x 4’) (2024) Sheet Materials Wholesale. Available at: <https://sheetmaterialswholesale.co.uk/flexible-plywood-long-grain-5-x-1220-x-2440mm/> (Accessed: 09 December 2024).

Props:
(No date) Amazon.co.uk: Low prices in electronics, books, Sports Equipment & more. Available at: https://www.amazon.co.uk/?&tag=hydraamazonav-21&ref=pd_

Q & A

DO YOU HAVE ANY QUESTION YOU HAVE IN MIND TO SHARE WITH US?

THANK YOU